

CORE IC PNEUMATIC



3000 - 6500 LBS.

SPECIFICATIONS



8FGU15-32 | 8FDU15-32

CLASS
5

INTERNAL COMBUSTION ENGINE PNEUMATIC TIRE

ToyotaForklift.com

CORE IC PNEUMATIC

CAPACITY
3000 – 6500 LBS.

WHEELBASE
58.5 – 66.9 IN.

LOAD CENTER
24 IN.

INDUSTRIES



Brick, Block
& Pipe



Distribution



Factory



General
Manufacturing



General
Warehousing



Lumber



Paper



Retail

STANDARD FEATURES

DURABILITY

- Control Area Network (CAN-bus) communication
- Limited free-lift 2-stage mast (V)
- Fully stamped steel side panels
- Moisture-resistant electric connectors
- Tilt cylinder boots

- High cooling capacity radiator with fan shroud
- Low-maintenance battery
- Large-capacity engine-cooling fan
- 7" cyclone air cleaner with high positioned external air intake
- Plate-iron front fenders

- Anti-restart ignition key switch
- Stamped steel engine hood
- Fully sealed air intake system
- Self-adjusting brakes
- Rear wheel well covers
- Scratch zones on both sides of counterweight

SUPPORT

- System of Active Stability™ (SAS)
- Operator Presence Sensing System (OPSS)
- Speed control
- Bolt-on overhead guard

- Key lowering interlock
- High-durability electric horn
- LED headlights
- Neutral start safety switch
- Asbestos-free components

- Single touch maximum speed limitation & low speed setting
- Key off/headlight off system

PERFORMANCE

- UL "G" gasoline engine
 - Toyota 4T-ECS 2.2 liter, 4-cylinder, OHV gasoline engine
 - EPA/CARB certified gasoline engine with 3-way catalytic muffler system
 - Distributor Less Ignition (DLI)
- Alternator with built-in regulator
- Automatic transmission with oil cooler
- Full-floating powertrain
- Electric shift control

- UL "D" diesel engine
 - Toyota 1ZS Toyota Direct Injection 4-stroke common rail diesel engine
 - EPA/CARB TIER 4 Final certified diesel engine with exhaust gas recirculation & diesel oxidation catalyst
- LCD multi-function display – includes:
 - Data log, fuel, and operation information with QR code output
 - Master warning, wheel, direction, and

- mast tilt indicators
- Various hours meters
- Engine coolant temperature gauge
- Fuel gauge (excluding LP)
- Check engine light
- Engine oil pressure warning light
- OPSS activation light
- Parking brake indicator
- SAS/OPSS warning light

ERGONOMICS/CABIN

- Dash-mounted instrument display
- 11.8"-dia., two-spoke steering wheel
- Load-sensing hydrostatic power steering
- Heavy-duty non-slip rubber floor mat
- 12"-long dual operator assist grips
- One-way automatic fork leveling

- Integrated headlight & turn signal lever
- Cowl-mounted hydraulic control levers with rubber boot covers
- Low, wide-entry steps
- Non-cinching seatbelt
- Independent brake & inching pedals

- Dash-integrated amenity tray
- Oversized cup holder
- Vinyl 4-way adjustable full-suspension seat
- Slim profile, tilt steering column
- Foot-activated parking brake

SERVICEABILITY

- Easy-access, no tools required floorboard
- Engine hood assist damper with lock device

- Air cleaner discharge valve
- Externally-mounted hydraulic oil return filter

- Dash-mounted brake fluid level check
- Easy-lift engine hood with wide 75° opening

OPTIONAL EQUIPMENT

- Travel speed/acceleration control system
- Hydraulic accumulator
- Intelli-Shift
- Orange seatbelt
- Rear assist grip with horn button
- Rustproof spec
- Mini-lever controls with ErgoShift
- Joystick controls with ErgoShift
- Swivel seat
- Synchronized steering
- LED front combination lights
- LED rear combination lights
- Deluxe steel cab
- Polycarbonate cab
- Standard steel cab
- 12-Volt power supply
- EZ Pedal (foot directional control)
- Plate fin radiator
- Radiator screen
- Fire extinguisher
- Steering wheel with knob
- Polished and tapered forks
- Integral & hang-on sidershifters
- Integral side shifting fork positioner
- Bottler's tilt
- LPG low-fuel warning light & alarm
- High-capacity 70-amp alternator (4Y-ECS models)
- Strobe lights
- Step-mounted toolbox with cover
- Cloth 4-way adjustable full-suspension seat
- Back up alarms
- Combination brake & inching pedal
- Pre-cleaner for air intake
- Rearview mirrors
- Wide tread tires
- UL "GS" gasoline model
- UL "DS" diesel model
- 4Y-ECS high-power engine
- Fuel system configurations with swing-out tank bracket & one-touch latch system
 - UL-LP
 - UL-LPS
 - UL-LPG dual fuel
- Swing-down LPG tank bracket
- Reverse-activated blue light
- Seatbelt interlock

Please contact your local, authorized Toyota Dealer for a complete list of available options.



TRUCK SPECIFICATIONS

				MODEL NUMBERS			
GENERAL DATA				8FGU15	8FDU15	8FGU18	8FDU18
Load Capacity		lb (kg)		3000 (1350)	3000 (1350)	3500 (1600)	3500 (1600)
Power Type				Gasoline	Diesel	Gasoline	Diesel
Operator Position				Seated Rider	Seated Rider	Seated Rider	Seated Rider
Tire Type	Front / Rear			Pneumatic / Pneumatic	Pneumatic / Pneumatic	Pneumatic / Pneumatic	Pneumatic / Pneumatic
Wheels (x = driven)	Front / Rear			2x / 2	2x / 2	2x / 2	2x / 2
EXTERIOR DIMENSIONS				8FGU15	8FDU15	8FGU18	8FDU18
A	Maximum Fork Height (top of forks)		in (mm)	131 (3335)	131 (3335)	131 (3335)	131 (3335)
B	Free-Lift (top of forks)		in (mm)	5.7 (145)	5.7 (145)	5.7 (145)	5.7 (145)
C	Fork Size (T x W x L)		in (mm)	1.4 x 4 x 42 (35 x 100 x 1070)	1.4 x 4 x 42 (35 x 100 x 1070)	1.4 x 4 x 42 (35 x 100 x 1070)	1.4 x 4 x 42 (35 x 100 x 1070)
D	Fork Spread Max. / Min. (outer edge to edge)		in (mm)	36 (920) / 8 (200)	36 (920) / 8 (200)	36 (920) / 8 (200)	36 (920) / 8 (200)
E	Tilt Range (forward / backward)		deg	6 / 11	6 / 11	6 / 11	6 / 11
F	Length to Fork Face		in (mm)	89.6 (2275)	89.6 (2275)	90.7 (2305)	90.7 (2305)
G	Overall Width		in (mm)	42.1 (1070)	42.1 (1070)	42.1 (1070)	42.1 (1070)
H	Mast Lowered Height		in (mm)	84.5 (2145)	84.5 (2145)	84.5 (2145)	84.5 (2145)
I	Mast Extended Height (top of load backrest)		in (mm)	179.3 (4555)	179.3 (4555)	179.3 (4555)	179.3 (4555)
J	Overhead Guard Height		in (mm)	81.9 (2080)	81.9 (2080)	81.9 (2080)	81.9 (2080)
K	Turning Radius (inside / outside)		in (mm)	1.38 (35) / 76 (1930)	1.38 (35) / 76 (1930)	1.38 (35) / 78 (1980)	78 (1980)
L	Load Distance¹		in (mm)	15.9 (405)	15.9 (405)	15.9 (405)	15.9 (405)
M	Rear Overhang		in (mm)	15.2 (385)	15.2 (385)	16.3 (415)	16.3 (415)
N	Basic Right-Angle Stacking Aisle Width²		in (mm)	91.9 (2335)	91.9 (2335)	93.9 (2385)	93.9 (2385)
PERFORMANCE DATA				8FGU15	8FDU15	8FGU18	8FDU18
Speeds	Maximum Travel (forward / reverse)	Full Load	mph (km/h)	11.5 (18.5) / 11.5 (18.5)	11.8 (19.0) / 11.8 (19.0)	11.5 (18.5) / 11.5 (18.5)	11.8 (19.0) / 11.8 (19.0)
		No Load	mph (km/h)	11.8 (19.0) / 11.8 (19.0)	12.1 (19.5) / 12.1 (19.5)	11.8 (19.0) / 11.8 (19.0)	12.1 (19.5) / 12.1 (19.5)
	Lifting	Full Load	fpm (mm/sec)	131 (665)	128 (650)	131 (665)	128 (650)
		No Load	fpm (mm/sec)	134 (680)	133 (675)	134 (680)	133 (675)
	Lowering	Full Load	fpm (mm/sec)	98 (500)	98 (500)	98 (500)	98 (500)
		No Load	fpm (mm/sec)	108 (550)	108 (550)	108 (550)	108 (550)
Drawbar Pull	Maximum	Full Load	lb (kg)	4400 (2000)	4040 (1830)	3930 (1780)	3930 (1780)
		No Load	lb (kg)	1550 (700)	1570 (710)	1300 (590)	1300 (590)
Gradeability	1 mph (1.5 km/h)³	Full Load	%	45	45	40	40
		Full Load	%	45	45	45	45
	Maximum³	No Load	%	22	22	20	10
TRUCK WEIGHTS				8FGU15	8FDU15	8FGU18	8FDU18
Total Weight		lb (kg)		5500 (2500)	5630 (2570)	5920 (2690)	6060 (2750)
Weight Distribution	Full Load (front / rear)		lb (kg)	7560 (3560) / 940 (440)	7610 (3590) / 1020 (480)	8400 (3960) / 1020 (480)	8460 (3990) / 1100 (510)
	No Load (front / rear)		lb (kg)	2500 (1140) / 3000 (1360)	2560 (1170) / 3070 (1400)	2500 (1140) / 3420 (1550)	2560 (1170) / 3500 (1580)
TIRES				8FGU15	8FDU15	8FGU18	8FDU18
Tires	Number (front / rear)			2 / 2	2 / 2	2 / 2	2 / 2
	Size	Front		6.50-10-10PR (1)	6.50-10-10PR (1)	6.50-10-10PR (1)	6.50-10-10PR (1)
		Rear		5.00-8-8PR (1)	5.00-8-8PR (1)	5.00-8-8PR (1)	5.00-8-8PR (1)
Wheelbase		in (mm)		58.5 (1485)	58.5 (1485)	58.5 (1485)	58.5 (1485)
Tread Width (front / rear)		in (mm)		34.8 (885) / 35.2 (895)	34.8 (885) / 35.2 (895)	34.8 (885) / 35.2 (895)	34.8 (885) / 35.2 (895)
Underclearance (full load)	Minimum with Load		in (mm)	3.9 (100)	3.9 (100)	3.9 (100)	3.9 (100)
	Center of Wheelbase		in (mm)	4.5 (115)	4.5 (115)	4.5 (115)	4.5 (115)
Brake	Service (foot) / Parking			Hydraulic / Mechanical	Hydraulic / Mechanical	Hydraulic / Mechanical	Hydraulic / Mechanical
POWER SYSTEM				8FGU15	8FDU15	8FGU18	8FDU18
Battery (5-hour rating)		V / Ah		12 / 48	12 / 52	12 / 48	12 / 52
Internal Combustion Engine	Make / Model			TOYOTA / 4Y - ECS	TOYOTA / 1ZS	TOYOTA / 4Y - ECS	TOYOTA / 1ZS
	Rated Horsepower @ rpm	SAE HP		51 @ 2570 Net	53 @ 2200 Net	51 @ 2570 Net	53 @ 2200 Net
		(kW)		(38 @ 2570)	(40 @ 2200)	(38 @ 2570)	(40 @ 2200)
	Rated Torque @ rpm	SAE ft-lb		118 @ 2100 Net	128 @ 1800 Net	118 @ 2100 Net	128 @ 1800 Net
		(N-m)		(160 @ 2100)	(174 @ 1800)	(160 @ 2100)	(174 @ 1800)
	Number of Cylinders			4	3	4	3
Piston Displacement		cu in (cc)	136 (2237)	110 (1795)	136 (2237)	110 (1795)	
Fuel Tank Capacity		US gal (liter)	12 (45)	12 (45)	12 (45)	12 (45)	
Transmission	Type			Powershift	Powershift	Powershift	Powershift
	Speeds (forward / reverse)			1 / 1	1 / 1	1 / 1	1 / 1
Auxiliary Hydraulic Function Specifications (for attachments)⁴	Max. Operating Pressure		psi (kg/cm2)	2275 (160)	2275 (160)	2275 (160)	2275 (160)
	Max. Flow Rate		gpm	17	17	17	17

1 Load distance at centerline of front axle to front face of forks.

2 Basic right-angle stacking aisle width, add load length & clearance.

3 Computed values. Performance of LPG fuel system may be less than that of standard model shown.

4 Values taken at Hydraulic Control Valve. Does not take in to consideration losses through mast plumbing (hosing, fittings, QDs, etc.).

MODEL NUMBERS

GENERAL DATA				8FGU20	8FDU20	8FGU25	8FDU25
Load Capacity			lb (kg)	4000 (1800)	4000 (1800)	5000 (2250)	5000 (2250)
Power Type				Gasoline	Diesel	Gasoline	Diesel
Operator Position				Seated Rider	Seated Rider	Seated Rider	Seated Rider
Tire Type	Front / Rear			Pneumatic / Pneumatic	Pneumatic / Pneumatic	Pneumatic / Pneumatic	Pneumatic / Pneumatic
Wheels (x = driven)	Front / Rear			2x / 2	2x / 2	2x / 2	2x / 2
EXTERIOR DIMENSIONS				8FGU20	8FDU20	8FGU25	8FDU25
A	Maximum Fork Height (top of forks)		in (mm)	131.5 (3340)	131.5 (3340)	131.5 (3340)	131.5 (3340)
B	Free-Lift (top of forks)		in (mm)	6.1 (155)	6.1 (155)	6.1 (155)	6.1 (155)
C	Fork Size (T x W x L)		in (mm)	1.6 x 5 x 42 (40 x 125 x 1070)	1.6 x 5 x 42 (40 x 125 x 1070)	1.6 x 5 x 42 (40 x 125 x 1070)	1.6 x 5 x 42 (40 x 125 x 1070)
D	Fork Spread Max. / Min. (outer edge to edge)		in (mm)	40 (1020) / 10 (250)	40 (1020) / 10 (250)	40 (1020) / 10 (250)	40 (1020) / 10 (250)
E	Tilt Range (forward / backward)		deg	6 / 11	6 / 11	6 / 11	6 / 11
F	Length to Fork Face		in (mm)	101.4 (2575)	101.4 (2575)	103.9 (2640)	103.9 (2640)
G	Overall Width		in (mm)	45.3 (1150)	45.3 (1150)	45.3 (1150)	45.3 (1150)
H	Mast Lowered Height		in (mm)	84.5 (2145)	84.5 (2145)	84.5 (2145)	84.5 (2145)
I	Mast Extended Height (top of load backrest)		in (mm)	179.5 (4560)	179.5 (4560)	179.5 (4560)	179.5 (4560)
J	Overhead Guard Height		in (mm)	83.1 (2110)	83.1 (2110)	83.1 (2110)	83.1 (2110)
K	Turning Radius (inside / outside)		in (mm)	5.91 (150) / 84.7 (2150)	5.91 (150) / 84.7 (2150)	5.91 (150) / 87.5 (2220)	5.91 (150) / 87.5 (2220)
L	Load Distance ¹		in (mm)	18.5 (470)	18.5 (470)	18.5 (470)	18.5 (470)
M	Rear Overhang		in (mm)	17.9 (455)	17.9 (455)	20.5 (520)	20.5 (520)
N	Basic Right-Angle Stacking Aisle Width ²		in (mm)	103.2 (2620)	103.2 (2620)	105.9 (2690)	105.9 (2690)
PERFORMANCE DATA				8FGU20	8FDU20	8FGU25	8FDU25
Speeds	Maximum Travel (forward / reverse)	Full Load	mph (km/h)	10.9 (17.5) / 10.9 (17.5)	10.3 (16.5) / 10.3 (16.5)	10.9 (17.5) / 10.9 (17.5)	10.3 (16.5) / 10.3 (16.5)
		No Load	mph (km/h)	11.2 (18.0) / 11.2 (18.0)	10.7 (17.0) / 10.7 (17.0)	11.2 (18.0) / 11.2 (18.0)	10.7 (17.0) / 10.7 (17.0)
	Lifting	Full Load	fpm (mm/sec)	118 (600)	121 (615)	118 (600)	121 (615)
		No Load	fpm (mm/sec)	126 (640)	129 (655)	126 (640)	129 (655)
	Lowering	Full Load	fpm (mm/sec)	98 (500)	98 (500)	98 (500)	98 (500)
		No Load	fpm (mm/sec)	98 (500)	98 (500)	98 (500)	98 (500)
Drawbar Pull	Maximum	Full Load	lb (kg)	4250 (1930)	4475 (2030)	4250 (1930)	4475 (2030)
		No Load	lb (kg)	2020 (920)	2040 (930)	1910 (870)	1930 (880)
Gradeability	1 mph (1.5 km/h) ³	Full Load	%	37	35	31	30
		Full Load	%	41	42	34	35
	Maximum ³	No Load	%	23	23	20	20
TRUCK WEIGHTS				8FGU20	8FDU20	8FGU25	8FDU25
Total Weight			lb (kg)	7080 (3210)	7230 (3290)	7840 (3560)	7990 (3630)
Weight Distribution	Full Load (front / rear)		lb (kg)	9750 (4600) / 1330 (610)	9810 (4630) / 1420 (660)	11260 (5330) / 1580 (730)	11320 (5350) / 1670 (780)
	No Load (front / rear)		lb (kg)	3130 (1420) / 3950 (1790)	3180 (1450) / 4050 (1840)	2980 (1350) / 4860 (2210)	3040 (1380) / 4950 (2250)
TIRES				8FGU20	8FDU20	8FGU25	8FDU25
Tires	Number (front / rear)			2 / 2	2 / 2	2 / 2	2 / 2
	Size	Front		7.00-12-12PR (1)	7.00-12-12PR (1)	7.00-12-12PR (1)	7.00-12-12PR (1)
		Rear		6.00-9-10PR (1)	6.00-9-10PR (1)	6.00-9-10PR (1)	6.00-9-10PR (1)
Wheelbase			in (mm)	65 (1650)	65 (1650)	65 (1650)	65 (1650)
Tread Width (front / rear)			in (mm)	37.8 (960) / 38.0 (965)	37.8 (960) / 38.0 (965)	37.8 (960) / 38.0 (965)	37.8 (960) / 38.0 (965)
Underclearance (full load)	Minimum with Load		in (mm)	3.7 (95)	3.7 (95)	3.7 (95)	3.7 (95)
	Center of Wheelbase		in (mm)	5.5 (140)	5.5 (140)	5.5 (140)	5.5 (140)
Brake	Service (foot) / Parking			Hydraulic / Mechanical	Hydraulic / Mechanical	Hydraulic / Mechanical	Hydraulic / Mechanical
POWER SYSTEM				8FGU20	8FDU20	8FGU25	8FDU25
Battery (5-hour rating)			V / Ah	12 / 48	12 / 52	12 / 48	12 / 52
Internal Combustion Engine	Make / Model			TOYOTA / 4Y - ECS	TOYOTA / 1ZS	TOYOTA / 4Y - ECS	TOYOTA / 1ZS
	Rated Horsepower @ rpm	SAE HP		51 @ 2570 Net	55 @ 2200 Net	51 @ 2570 Net	55 @ 2200 Net
		(kW)		(38 @ 2570)	(41 @ 2200)	(38 @ 2570)	(41 @ 2200)
	Rated Torque @ rpm	SAE ft-lb		118 @ 2100 Net	148 @ 1600 Net	118 @ 2100 Net	148 @ 1600 Net
		(N-m)		(160 @ 2100)	(200 @ 1600)	(160 @ 2100)	(200 @ 1600)
	Number of Cylinders			4	3	4	3
	Piston Displacement		cu in (cc)	136 (2237)	110 (1795)	136 (2237)	110 (1795)
Fuel Tank Capacity		US gal (liter)	15.9	15.9	15.9	15.9	
Transmission	Type			Powershift	Powershift	Powershift	Powershift
	Speeds (forward / reverse)			1 / 1	1 / 1	1 / 1	1 / 1
Auxiliary Hydraulic Function Specifications (for attachments) ⁴	Max. Operating Pressure		psi (kg/cm2)	2275 (160)	2275 (160)	2275 (160)	2275 (160)
	Max. Flow Rate		gpm	20	19	20	19

1 Load distance at centerline of front axle to front face of forks.

2 Basic right-angle stacking aisle width, add load length & clearance.

3 Computed values. Performance of LPG fuel system may be less than that of standard model shown.

4 Values taken at Hydraulic Control Valve. Does not take in to consideration losses through mast plumbing (hosing, fittings, QDs, etc.).

TRUCK SPECIFICATIONS

				MODEL NUMBERS			
GENERAL DATA				8FGU30	8FDU30	8FGU32	8FDU32
Load Capacity		lb (kg)		6000 (2700)	6000 (2700)	6500 (3000)	6500 (3000)
Power Type				Gasoline	Diesel	Gasoline	Diesel
Operator Position				Seated Rider	Seated Rider	Seated Rider	Seated Rider
Tire Type	Front / Rear			Pneumatic / Pneumatic	Pneumatic / Pneumatic	Pneumatic / Pneumatic	Pneumatic / Pneumatic
Wheels (x = driven)	Front / Rear			2x / 2	2x / 2	2x / 2	2x / 2
EXTERIOR DIMENSIONS				8FGU30	8FDU30	8FGU32	8FDU32
A	Maximum Fork Height (top of forks)	in (mm)		131.5 (3345)	131.5 (3345)	131.5 (3345)	131.5 (3345)
B	Free-Lift (top of forks)	in (mm)		5.3 (135)	5.3 (135)	5.3 (135)	5.3 (135)
C	Fork Size (T x W x L)	in (mm)		1.8 x 5 x 42 (45 x 125 x 1070)	1.8 x 5 x 42 (45 x 125 x 1070)	1.8 x 5 x 42 (45 x 125 x 1070)	1.8 x 5 x 42 (45 x 125 x 1070)
D	Fork Spread Max. / Min. (outer edge to edge)	in (mm)		42 (1070) / 10 (250)	42 (1070) / 10 (250)	42 (1070) / 10 (250)	42 (1070) / 10 (250)
E	Tilt Range (forward / backward)	deg		6 / 11	6 / 11	6 / 11	6 / 11
F	Length to Fork Face	in (mm)		109.4 (2780)	109.4 (2780)	110.2 (2800)	110.2 (2800)
G	Overall Width	in (mm)		48.8 (1240)	48.8 (1240)	48.8 (1240)	48.8 (1240)
H	Mast Lowered Height	in (mm)		85.3 (2165)	85.3 (2165)	85.3 (2165)	85.3 (2165)
I	Mast Extended Height (top of load backrest)	in (mm)		179.7 (4565)	179.7 (4565)	179.7 (4565)	179.7 (4565)
J	Overhead Guard Height	in (mm)		85.5 (2170)	85.5 (2170)	85.5 (2170)	85.5 (2170)
K	Turning Radius (inside / outside)	in (mm)		7.48 (190) / 92.5 (2350)	7.48 (190) / 92.5 (2350)	93.3 (2370)	93.3 (2370)
L	Load Distance¹	in (mm)		19.1 (485)	19.1 (485)	19.1 (485)	19.1 (485)
M	Rear Overhang	in (mm)		23 (595)	23 (595)	24 (615)	24 (615)
N	Basic Right-Angle Stacking Aisle Width²	in (mm)		111.6 (2835)	111.6 (2835)	112.4 (2855)	112.4 (2855)
PERFORMANCE DATA				8FGU30	8FDU30	8FGU32	8FDU32
Speeds	Maximum Travel (forward / reverse)	Full Load	mph (km/h)	11.2 (18.0) / 11.2 (18.0)	10.3 (16.5) / 10.3 (16.5)	11.2 (18.0) / 11.2 (18.0)	10.3 (16.5) / 10.3 (16.5)
		No Load	mph (km/h)	11.5 (18.5) / 11.5 (18.5)	10.7 (17.0) / 10.7 (17.0)	11.5 (18.5) / 11.5 (18.5)	10.7 (17.0) / 10.7 (17.0)
	Lifting	Full Load	fpm (mm/sec)	100 (510)	98 (500)	100 (510)	98 (500)
		No Load	fpm (mm/sec)	108 (550)	104 (530)	108 (550)	104 (530)
	Lowering	Full Load	fpm (mm/sec)	98 (500)	98 (500)	98 (500)	98 (500)
		No Load	fpm (mm/sec)	98 (500)	98 (500)	98 (500)	98 (500)
Drawbar Pull	Maximum	Full Load	lb (kg)	4400 (2000)	4475 (2030)	4400 (2000)	4475 (2030)
		No Load	lb (kg)	2310 (1050)	2340 (1060)	2310 (1050)	2340 (1060)
Gradeability	1 mph (1.5 km/h)³	Full Load	%	24	26	24	25
		Full Load	%	26	30	26	29
	Maximum³	No Load	%	21	20	21	20
TRUCK WEIGHTS				8FGU30	8FDU30	8FGU32	8FDU32
Total Weight		lb (kg)		9270 (4210)	9270 (4210)	9500 (4320)	9650 (4390)
Weight Distribution	Full Load (front / rear)	lb (kg)		13290 (6300) / 1980 (910)	13290 (6300) / 1980 (910)	14050 (6670) / 1950 (900)	14110 (6700) / 2040 (940)
	No Load (front / rear)	lb (kg)		3430 (1560) / 5840 (2650)	3430 (1560) / 5840 (2650)	3360 (1530) / 6140 (2790)	3420 (1560) / 6230 (2830)
TIRES				8FGU30	8FDU30	8FGU32	8FDU32
Tires	Number (front / rear)			2 / 2	2 / 2	2 / 2	2 / 2
	Size	Front		28 x 9-15-12PR (1)	28 x 9-15-12PR (1)	28 x 9-15-14PR (1)	28 x 9-15-14 PR (1)
		Rear		6.50-10-10PR (1)	6.50-10-10PR (1)	6.50-10-10PR (1)	6.50-10-10PR (1)
Wheelbase		in (mm)		66.9 (1700)	66.9 (1700)	66.9 (1700)	66.9 (1700)
Tread Width (front / rear)		in (mm)		39.8 (1010) / 38 (965)	39.8 (1010) / 38 (965)	39.8 (1010) / 38 (965)	39.8 (1010) / 38 (965)
Underclearance (full load)	Minimum with Load		in (mm)	4.5 (115)	4.5 (115)	4.5 (115)	4.5 (115)
	Center of Wheelbase		in (mm)	7.3 (185)	7.3 (185)	7.3 (185)	7.3 (185)
Brake	Service (foot) / Parking			Hydraulic / Mechanical	Hydraulic / Mechanical	Hydraulic / Mechanical	Hydraulic / Mechanical
POWER SYSTEM				8FGU30	8FDU30	8FGU32	8FDU32
Battery (5-hour rating)		V / Ah		12 / 48	12 / 52	12 / 48	12 / 52
Internal Combustion Engine	Make / Model			TOYOTA / 4Y - ECS - HP⁵	TOYOTA / 1ZS	TOYOTA / 4Y - ECS - HP⁵	TOYOTA / 1ZS
	Rated Horsepower @ rpm	SAE HP		57 @ 2570 Net	55 @ 2200 Net	57 @ 2570 Net	55 @ 2200 Net
		(kW)		(42 @ 2570)	(41 @ 2200)	(42 @ 2570)	(41 @ 2200)
	Rated Torque @ rpm	SAE ft-lb		118 @ 2200 Net	148 @ 1600 Net	118 @ 2200 Net	148 @ 1600 Net
		(N-m)		(160 @ 2200)	(200 @ 1600)	(160 @ 2200)	(200 @ 1600)
	Number of Cylinders			4	3	4	3
Piston Displacement		cu in (cc)		136 (2237)	110 (1795)	136 (2237)	110 (1795)
Fuel Tank Capacity		US gal (liter)		15.9 (60)	15.9 (60)	15.9 (60)	15.9 (60)
Transmission	Type			Powershift	Powershift	Powershift	Powershift
	Speeds (forward / reverse)			1 / 1	1 / 1	1 / 1	1 / 1
Auxiliary Hydraulic Function Specifications (for attachments)⁴	Max. Operating Pressure		psi (kg/cm2)	2275 (160)	2275 (160)	2275 (160)	2275 (160)
	Max. Flow Rate		gpm	21	20	21	20

1 Load distance at centerline of front axle to front face of forks.


2 Basic right-angle stacking aisle width, add load length & clearance.

3 Computed values. Performance of LPG fuel system may be less than that of standard model shown.

4 Values taken at Hydraulic Control Valve. Does not take in to consideration losses through mast plumbing (hosing, fittings, QDs, etc.).

5 LPG-only units.

EXTERIOR DIMENSIONS

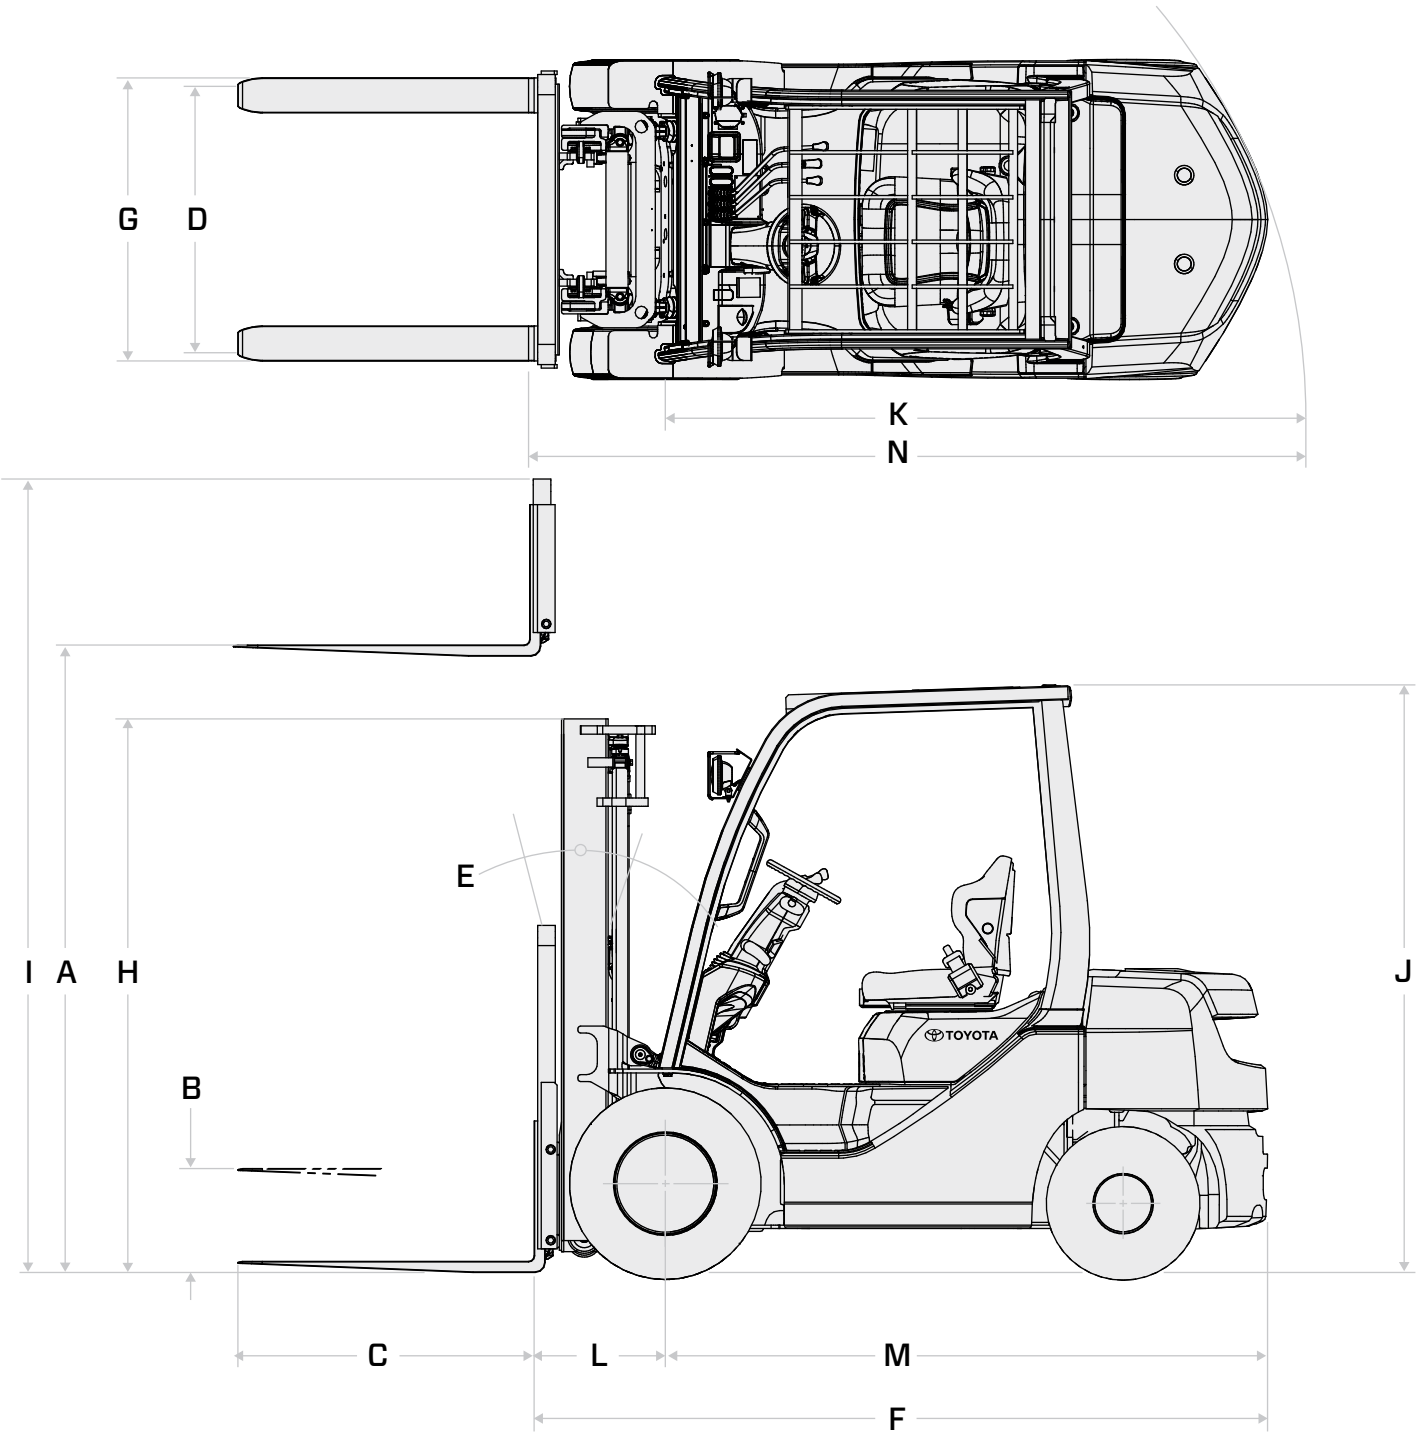

MAST SPECIFICATIONS

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		SINGLE TIRE			
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹	TILT RANGE		LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹			FWD	BWD	NARROW TREAD	WIDE TREAD
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)	lb (kg)
8FGU15 / 8FDU15										
Wide Visible (V)	80 (2035)	58.9 (1495)	104.1 (2645)	128.1 (3255)	5.7 (145)	5.7 (145)	6	11	3000 (1350)	3000 (1350)
	119 (3035)	78.5 (1995)	143.5 (3645)	167.5 (4255)	5.7 (145)	5.7 (145)	6	11	3000 (1350)	3000 (1350)
	131 (3335)	84.5 (2145)	155.3 (3945)	179.3 (4555)	5.7 (145)	5.7 (145)	6	11	3000 (1350)	3000 (1350)
	139 (3535)	88.4 (2245)	163.2 (4145)	187.2 (4755)	5.7 (145)	5.7 (145)	6	11	3000 (1350)	3000 (1350)
	147 (3735)	94.7 (2405)	171.1 (4345)	195.1 (4955)	5.7 (145)	5.7 (145)	6	11	3000 (1350)	3000 (1350)
	158.5 (4035)	102.2 (2595)	182.9 (4645)	206.9 (5255)	5.7 (145)	5.7 (145)	6	11	3000 (1350)	3000 (1350)
Full Free-Lift 2-Stage (FV)	119 (3035)	78.5 (1995)	141.9 (3605)	167.5 (4255)	56.1 (1430)	30.5 (775)	6	11	3000 (1350)	3000 (1350)
	131 (3335)	84.5 (2145)	153.7 (3905)	179.3 (4555)	62 (1580)	36.4 (925)	6	11	3000 (1350)	3000 (1350)
	139 (3535)	88.4 (2245)	161.6 (4105)	187.2 (4755)	65.9 (1680)	40.4 (1025)	6	11	3000 (1350)	3000 (1350)
Full Free-Lift 3-Stage (FSV)	158.5 (4035)	74.6 (1895)	180.1 (4575)	206.9 (5255)	53.3 (1360)	25.0 (635)	6	6	2850 (1300)	2850 (1300)
	170.5 (4335)	78.5 (1995)	191.9 (4875)	218.7 (5555)	57.3 (1460)	28.9 (735)	6	6	2800 (1250)	2850 (1300)
	189 (4800)	84.4 (2145)	209.6 (5325)	236.6 (6010)	63.2 (1610)	34.8 (885)	6	6	2750 (1250)	2800 (1250)
	198 (5035)	88.4 (2245)	219.5 (5575)	246.3 (6255)	67.1 (1710)	38.8 (985)	6	6	2650 (1200)	2750 (1250)
	217.5 (5535)	94.7 (2405)	239.2 (6075)	265.9 (6755)	73.4 (1870)	45.1 (1145)	6	6	2050 (950)	2200 (1000)
	237.5 (6035)	102.2 (2595)	258.9 (6575)	285.6 (7255)	80.9 (2060)	52.6 (1335)	6	6	1500 (700)	1650 (750)

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		SINGLE TIRE			
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹	TILT RANGE		LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER	
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹			FWD	BWD	NARROW TREAD	WIDE TREAD
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	deg	lb (kg)	lb (kg)
8FGU18 / 8FDU18										
Wide Visible (V)	80 (2035)	58.9 (1495)	104.1 (2645)	128.1 (3255)	5.7 (145)	5.7 (145)	6	11	3500 (1600)	3500 (1600)
	119 (3035)	78.5 (1995)	143.5 (3645)	167.5 (4255)	5.7 (145)	5.7 (145)	6	11	3500 (1600)	3500 (1600)
	131 (3335)	84.5 (2145)	155.3 (3945)	179.3 (4555)	5.7 (145)	5.7 (145)	6	11	3500 (1600)	3500 (1600)
	139 (3535)	88.4 (2245)	163.2 (4145)	187.2 (4755)	5.7 (145)	5.7 (145)	6	11	3500 (1600)	3500 (1600)
	147 (3735)	94.7 (2405)	171.1 (4345)	195.1 (4955)	5.7 (145)	5.7 (145)	6	11	3500 (1600)	3500 (1600)
	158.5 (4035)	102.2 (2595)	182.9 (4645)	206.9 (5255)	5.7 (145)	5.7 (145)	6	11	3400 (1550)	3500 (1600)
Full Free-Lift 2-Stage (FV)	119 (3035)	78.5 (1995)	141.9 (3605)	167.5 (4255)	56.1 (1430)	30.5 (775)	6	11	3500 (1600)	3500 (1600)
	131 (3335)	84.5 (2145)	153.7 (3905)	179.3 (4555)	62 (1580)	36.4 (925)	6	11	3500 (1600)	3500 (1600)
	139 (3535)	88.4 (2245)	161.6 (4105)	187.2 (4755)	65.9 (1680)	40.4 (1025)	6	11	3500 (1600)	3500 (1600)
Full Free-Lift 3-Stage (FSV)	158.5 (4035)	74.6 (1895)	180.1 (4575)	206.9 (5255)	53.3 (1360)	25.0 (635)	6	6	3200 (1450)	3200 (1450)
	170.5 (4335)	78.5 (1995)	191.9 (4875)	218.7 (5555)	57.3 (1460)	28.9 (735)	6	6	3150 (1400)	3200 (1450)
	189 (4800)	84.4 (2145)	209.6 (5325)	236.6 (6010)	63.2 (1610)	34.8 (885)	6	6	2900 (1300)	3050 (1400)
	198 (5035)	88.4 (2245)	219.5 (5575)	246.3 (6255)	67.1 (1710)	38.8 (985)	6	6	2550 (1150)	3000 (1350)
	217.5 (5535)	94.7 (2405)	239.2 (6075)	265.9 (6755)	73.4 (1870)	45.1 (1145)	6	6	1850 (850)	2400 (1100)
	237.5 (6035)	102.2 (2595)	258.9 (6575)	285.6 (7255)	80.9 (2060)	52.6 (1335)	6	6	1300 (600)	1750 (800)

1 Height of standard load backrest is 48" (1220 mm).

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		SINGLE TIRE			DUAL TIRE	
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹	TILT RANGE	LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER		TILT RANGE	LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹				FWD / BWD	NARROW TREAD		
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	lb (kg)	lb (kg)	deg	lb (kg)
8FGU20 / 8FDU20											
Wide Visible (V)	80 (2040)	58.9 (1495)	104.7 (2660)	128.3 (3260)	6.1 (155)	6.1 (155)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
	119.5 (3040)	78.5 (1995)	144.1 (3660)	167.7 (4260)	6.1 (155)	6.1 (155)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
	131.5 (3340)	84.5 (2145)	155.9 (3960)	179.5 (4560)	6.1 (155)	6.1 (155)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
	139 (3540)	88.4 (2245)	163.8 (4160)	187.4 (4760)	6.1 (155)	6.1 (155)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
	147 (3740)	94.7 (2405)	171.7 (4360)	195.3 (4960)	6.1 (155)	6.1 (155)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
	159 (4040)	102.2 (2595)	183.5 (4660)	207.1 (5260)	6.1 (155)	6.1 (155)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
Full Free-Lift 2-Stage (FV)	119.5 (3040)	78.5 (1995)	143.5 (3645)	167.7 (4260)	55.1 (1400)	30.5 (775)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
	131.5 (3340)	84.5 (2145)	151.4 (3845)	179.5 (4560)	61 (1550)	36.4 (925)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
	139 (3540)	88.4 (2245)	163.2 (4145)	187.4 (4760)	65 (1650)	40.4 (1025)	6 / 11	4000 (1800)	4000 (1800)	6 / 11	4000 (1800)
Full Free-Lift 3-Stage (FSV)	159 (4040)	74.6 (1895)	181.5 (4610)	206.7 (5250)	52.4 (1330)	26.6 (675)	6 / 6	4000 (1800)	4000 (1800)	6 / 6	4000 (1800)
	170.5 (4340)	78.5 (1995)	193.3 (4910)	218.5 (5550)	56.3 (1430)	30.5 (775)	6 / 6	4000 (1800)	4000 (1800)	6 / 6	4000 (1800)
	189 (4800)	84.5 (2145)	211.4 (5370)	236.6 (6010)	62.2 (1580)	36.4 (915)	6 / 6	3900 (1750)	4000 (1800)	6 / 6	4000 (1800)
	198 (5040)	88.4 (2245)	220.9 (5610)	246.1 (6250)	66.1 (1680)	40.4 (1015)	6 / 6	3550 (1600)	4000 (1800)	6 / 6	4000 (1800)
	218 (5540)	94.7 (2405)	240.6 (6110)	265.7 (6750)	72.4 (1840)	46.7 (1185)	6 / 6	2800 (1250)	3500 (1600)	6 / 6	3750 (1700)
	237.5 (6040)	102.2 (2595)	260.2 (6610)	285.4 (7250)	79.9 (2030)	54.2 (1375)	6 / 6	2000 (900)	2550 (1150)	6 / 6	3300 (1500)
	257.5 (6540)	112 (2845)	279.9 (7110)	305.1 (7750)	89.8 (2280)	64 (1625)	—	—	—	6 / 6	3200 (1450)
	277 (7040)	121.9 (3095)	299.6 (7610)	324.8 (8250)	99.6 (2530)	73.9 (1875)	—	—	—	6 / 6	2600 (1200)
Full Free-Lift 4-Stage (QFV)	240 (6100)	84.8 (2155)	263.4 (6690)	289.4 (7350)	61 (1550)	35 (895)	6 / 3	—	—	6 / 3	—
	258 (6600)	90.7 (2305)	281.5 (7150)	307.5 (7810)	67 (1700)	41 (1045)	6 / 3	—	2600 (1170)	6 / 3	—

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		SINGLE TIRE			DUAL TIRE	
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹	TILT RANGE	LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER		TILT RANGE	LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST ¹				FWD / BWD	NARROW TREAD		
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	lb (kg)	lb (kg)	deg	lb (kg)
8FGU25 / 8FDU25											
Wide Visible (V)	80 (2040)	58.9 (1495)	104.7 (2660)	128.3 (3260)	6.1 (155)	6.1 (155)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
	119.5 (3040)	78.5 (1995)	144.1 (3660)	167.7 (4260)	6.1 (155)	6.1 (155)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
	131.5 (3340)	84.5 (2145)	155.9 (3960)	179.5 (4560)	6.1 (155)	6.1 (155)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
	139 (3540)	88.4 (2245)	163.8 (4160)	187.4 (4760)	6.1 (155)	6.1 (155)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
	147 (3740)	94.7 (2405)	171.7 (4360)	195.3 (4960)	6.1 (155)	6.1 (155)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
	159 (4040)	102.2 (2595)	183.5 (4660)	207.1 (5260)	6.1 (155)	6.1 (155)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
Full Free-Lift 2-Stage (FV)	119.5 (3040)	78.5 (1995)	143.5 (3645)	167.7 (4260)	55.1 (1400)	30.5 (775)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
	131.5 (3340)	84.5 (2145)	151.4 (3845)	179.5 (4560)	61 (1550)	36.4 (925)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
	139 (3540)	88.4 (2245)	163.2 (4145)	187.4 (4760)	65 (1650)	40.4 (1025)	6 / 11	5000 (2250)	5000 (2250)	6 / 11	5000 (2250)
Full Free-Lift 3-Stage (FSV)	159 (4040)	74.6 (1895)	181.5 (4610)	206.7 (5250)	52.4 (1330)	26.6 (675)	6 / 6	5000 (2250)	5000 (2250)	6 / 6	5000 (2250)
	170.5 (4340)	78.5 (1995)	193.3 (4910)	218.5 (5550)	56.3 (1430)	30.5 (775)	6 / 6	5000 (2250)	5000 (2250)	6 / 6	5000 (2250)
	189 (4800)	84.5 (2145)	211.4 (5370)	236.6 (6010)	62.2 (1580)	36.4 (915)	6 / 6	3950 (1800)	4850 (2200)	6 / 6	4950 (2250)
	198 (5040)	88.4 (2245)	220.9 (5610)	246.1 (6250)	66.1 (1680)	40.4 (1015)	6 / 6	3550 (1600)	4500 (2050)	6 / 6	4850 (2200)
	218 (5540)	94.7 (2405)	240.6 (6110)	265.7 (6750)	72.4 (1840)	46.7 (1185)	6 / 6	2850 (1300)	3850 (1750)	6 / 6	4500 (2050)
	237.5 (6040)	102.2 (2595)	260.2 (6610)	285.4 (7250)	79.9 (2030)	54.2 (1375)	6 / 6	2000 (900)	2550 (1150)	6 / 6	3500 (1600)
	257.5 (6540)	112 (2845)	279.9 (7110)	305.1 (7750)	89.8 (2280)	64 (1625)	—	—	—	6 / 6	3200 (1450)
	277 (7040)	121.9 (3095)	299.6 (7610)	324.8 (8250)	99.6 (2530)	73.9 (1875)	—	—	—	6 / 6	2500 (1150)
Full Free-Lift 4-Stage (QFV)	240 (6100)	84.8 (2155)	263.4 (6690)	289.4 (7350)	61 (1550)	35 (895)	6 / 3	—	3800 (1720)	6 / 3	—
	258 (6600)	90.7 (2305)	281.5 (7150)	307.5 (7810)	67 (1700)	41 (1045)	6 / 3	—	—	6 / 3	—

¹ Height of standard load backrest is 48" (1220 mm).
Wide tread standard for all models with a 189" & higher FSV mast. Wide tread deduct option (GDOF) will configure back to narrow tread.
High-lift SAS active mast functions not available on 80V mast.
Must have Dual Drive Tires (F00C) at extra cost for 258 FSV, 277 FSV.
Please contact your local, authorized Toyota Dealer for a complete list of available options.

MAST SPECIFICATIONS

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		SINGLE TIRE			DUAL TIRE	
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹	TILT RANGE	LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER		TILT RANGE	LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹				FWD / BWD	NARROW TREAD		
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	lb (kg)	lb (kg)	deg	lb (kg)
8FGU30 / 8FDU30											
Wide Visible (V)	80.5 (2045)	59.6 (1515)	108.3 (2750)	128.5 (3265)	5.3 (135)	5.3 (135)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
	119.5 (3045)	79.3 (2015)	147.6 (3750)	167.9 (4265)	5.3 (135)	5.3 (135)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
	131.5 (3345)	85 (2165)	159.4 (4050)	179.7 (4565)	5.3 (135)	5.3 (135)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
	139.5 (3545)	89.2 (2265)	167.3 (4250)	187.6 (4765)	5.3 (135)	5.3 (135)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
	147 (3745)	95.5 (2425)	175.2 (4450)	195.5 (4965)	5.3 (135)	5.3 (135)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
	159 (4045)	103 (2615)	187 (4750)	207.3 (5265)	5.3 (135)	5.3 (135)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
Full Free-Lift 2-Stage (FV)	119.5 (3045)	79.3 (2015)	144.1 (3660)	167.9 (4265)	55.1 (1400)	31.3 (795)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
	131.5 (3345)	85.0 (2165)	155.9 (3960)	179.7 (4565)	61 (1550)	37.2 (945)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
	139.5 (3545)	89.2 (2265)	163.8 (4160)	187.6 (4765)	65 (1650)	41.2 (1045)	6 / 11	6000 (2700)	6000 (2700)	6 / 11	6000 (2700)
Full Free-Lift 3-Stage (FSV)	159 (4045)	79.3 (2015)	183.5 (4660)	207.3 (5265)	55.1 (1400)	31.3 (795)	6 / 6	6000 (2750)	6000 (2750)	6 / 6	6000 (2750)
	171 (4345)	85.2 (2165)	195.3 (4960)	219.1 (5565)	61 (1550)	37.2 (945)	6 / 6	6000 (2750)	6000 (2750)	6 / 6	6000 (2750)
	187 (4750)	89.2 (2265)	211.0 (5360)	235 (5970)	65 (1650)	41.2 (1045)	6 / 6	6000 (2750)	6000 (2750)	6 / 6	6000 (2750)
	198.5 (5045)	95.5 (2425)	222.8 (5660)	246.7 (6265)	71.3 (1810)	47.5 (1205)	6 / 6	5600 (2550)	5800 (2650)	6 / 6	6000 (2700)
	218 (5545)	103 (2615)	242.5 (6160)	266.3 (6765)	78.7 (2000)	55 (1395)	6 / 6	4200 (1900)	5300 (2400)	6 / 6	5600 (2550)
	237.5 (6045)	112.8 (2865)	262.2 (6660)	286 (7265)	88.6 (2250)	64.8 (1645)	6 / 6	3100 (1400)	3500 (1600)	6 / 6	4300 (1950)
	257.5 (6545)	122.6 (3115)	281.9 (7160)	305.7 (7765)	98.4 (2500)	74.6 (1895)	—	—	—	6 / 6	3500 (1600)
	277 (7045)	132.5 (3365)	301.6 (7660)	325.4 (8265)	108.3 (2750)	84.5 (2145)	—	—	—	6 / 6	2600 (1200)
Full Free-Lift 4-Stage (QFV)	240 (6100)	84.8 (2155)	263.4 (6690)	289.4 (7350)	61 (1550)	35 (895)	6 / 3	—	4900 (2220)	6 / 3	—
	258 (6600)	90.7 (2305)	281.5 (7150)	307.5 (7810)	67 (1700)	41 (1045)	6 / 3	—	—	6 / 3	—

MAST TYPE	MAXIMUM FORK HEIGHT (TOP OF FORKS)	OVERALL HEIGHT			FREE-LIFT		SINGLE TIRE			DUAL TIRE	
		LOWERED	EXTENDED		WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹	TILT RANGE	LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER		TILT RANGE	LOAD CAPACITY AT 24 IN. (610 MM) LOAD CENTER
			WITHOUT LOAD BACKREST	WITH STANDARD LOAD BACKREST¹				FWD / BWD	NARROW TREAD		
	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	in (mm)	deg	lb (kg)	lb (kg)	deg	lb (kg)
8FGU32 / 8FDU32											
Wide Visible (V)	80.5 (2045)	59.6 (1515)	108.3 (2750)	128.5 (3265)	5.3 (135)	5.3 (135)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
	119.5 (3045)	79.3 (2015)	147.6 (3750)	167.9 (4265)	5.3 (135)	5.3 (135)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
	131.5 (3345)	85 (2165)	159.4 (4050)	179.7 (4565)	5.3 (135)	5.3 (135)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
	139.5 (3545)	89.2 (2265)	167.3 (4250)	187.6 (4765)	5.3 (135)	5.3 (135)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
	147 (3745)	95.5 (2425)	175.2 (4450)	195.5 (4965)	5.3 (135)	5.3 (135)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
	159 (4045)	103 (2615)	187 (4750)	207.3 (5265)	5.3 (135)	5.3 (135)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
Full Free-Lift 2-Stage (FV)	119.5 (3045)	79.3 (2015)	149.2 (3790)	167.9 (4265)	50 (1270)	31.3 (795)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
	131.5 (3345)	85.0 (2165)	161.0 (4090)	179.7 (4565)	55.9 (1420)	37.2 (945)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
	139.5 (3545)	89.2 (2265)	168.3 (4290)	187.6 (4765)	59.8 (1520)	41.2 (1045)	6 / 11	6500 (3000)	6500 (3000)	6 / 11	6500 (3000)
Full Free-Lift 3-Stage (FSV)	159 (4045)	79.3 (2015)	188.6 (4790)	207.3 (5265)	50 (1270)	31.3 (795)	6 / 6	6500 (3000)	6500 (3000)	6 / 6	6500 (3000)
	171 (4345)	85.2 (2165)	200.4 (5090)	219.1 (5565)	55.9 (1420)	37.2 (945)	6 / 6	6500 (3000)	6500 (3000)	6 / 6	6500 (3000)
	187 (4750)	89.2 (2265)	216.1 (5490)	235 (5970)	59.8 (1520)	41.2 (1045)	6 / 6	6500 (3000)	6500 (3000)	6 / 6	6500 (3000)
	198.5 (5045)	95.5 (2425)	228.0 (5790)	246.7 (6265)	66.1 (1680)	47.5 (1205)	6 / 6	5750 (2600)	6400 (2900)	6 / 6	6500 (2950)
	218 (5545)	103 (2615)	247.6 (6290)	266.3 (6765)	73.6 (1870)	55 (1395)	6 / 6	4200 (1900)	5500 (2500)	6 / 6	5800 (2650)
	237.5 (6045)	112.8 (2865)	267.3 (6790)	286 (7265)	83.5 (2120)	64.8 (1645)	6 / 6	3300 (1500)	4000 (1800)	6 / 6	4500 (2050)
	257.5 (6545)	122.6 (3115)	287.0 (7290)	305.7 (7765)	93.3 (2370)	74.6 (1895)	—	—	—	6 / 6	3500 (1600)
	277 (7045)	132.5 (3365)	306.7 (7790)	325.4 (8265)	103.1 (2620)	84.5 (2145)	—	—	—	6 / 6	2300 (1050)
Full Free-Lift 4-Stage (QFV)	240 (6100)	84.8 (2155)	263.4 (6690)	289.4 (7350)	61 (1550)	35 (895)	6 / 3	—	3800 (1720)	6 / 3	—
	258 (6600)	90.7 (2305)	281.5 (7150)	307.5 (7810)	67 (1700)	40 (1010)	6 / 3	—	3200 (1450)	6 / 3	—

1 Height of standard load backrest is 48" (1220 mm).
High-lift SAS active mast functions not available on 80V mast.
Must have Dual Drive Tires (FOOC) at extra cost for 258 FSV, 277 FSV.
Please contact your local, authorized Toyota Dealer for a complete list of available options.





"I'M HERE TO MAKE SURE YOUR FORKLIFTS DON'T TAKE VACATION DAYS."

Butch - 360 Technician, ProLift, Cincinnati, Ohio



HELP IS ALWAYS HERE WITH TOYOTA 360 SUPPORT.

The industry's best and most comprehensive dealer network quickly delivers Toyota Certified Technicians to your work site. These specially-trained technicians can also help assess your warehouse and facility needs to recommend the right equipment for the job. And with the largest fleet of used and rental forklifts, Toyota 360 keeps your business running at full speed.

ToyotaForklift.com/360-Support



YOUR BUSINESS IS RIDING ON IT.

Some product features described herein are optional. Please consult your dealer for specifications. Details of specifications and equipment are based on information available at time of printing and may change without notice.



007228FGU1532SS

©2020 Toyota Material Handling, Inc.