



STANDARD FEATURES

- 6,000 lb. (2722kg) Capacity at 24" (600mm) Load Center
- Four-Wheel Design, Dual Independently Driven Front Wheels
- Solid, Pneumatic-Style Drive and Steer Tires
- LPG Engine, GM 4.3L Tier III and LPG Fuel System (Tank Not Included)
- Integrated Computer Controlled Hydrostatic Drive
- Hydrostatic Power Steering with Tilt Steering Wheel
- Dual Joystick Hydraulic Control Levers
- 23" (584mm) of Shift Includes 2" (51mm) of Reach
- 40" (1016mm) Forks with Standard Bottom Taper and Class III Carriage and Long Load Handling Package
- Dash Display Contains: Engine Coolant Temperature Gauge, Hour Meter, Clock, Warning Icons, and Display Function Buttons
- 91" (2311mm) High Overhead Guard
- 42" (1067mm) High Load Backrest, 48" (1219mm) Wide Fork Carriage
- Neutral Start, Anti Restart, Operator Presence Seat Switch
- Adjustable Steering Column, Key Switch, Rear View Mirror, Horn and Seat Belt
- Comfortable Seated Operation with Vinyl Suspension Seat
- Mast Tilt of 3° Forward and 4° Backward

OPTIONAL FEATURES

- Non-Standard Fork Lengths
- LED Headlights, Flashing Light and Rear Safety Lights
- Integral Fork Positioner
- Single Auxiliary Hydraulics
- Cloth Seat
- Fire Extinguisher
- Steel / Glass Cab with Wipers, Heater and Defroster
- Vinyl Cab Enclosure

R60i5

**4-Wheel Heavy Capacity
LP Gas Side Loader VNA Truck**





**Material Handling
Products**

DREXEL R60i5

LP Gas Sideloader | Swing Mast™ VNA Truck

TECHNICAL DATA

| MODEL | | | |
|------------------------------------|--|---------|---------------------------------|
| Capacity | 24" (600mm) Load Center | lbs/kg | 6,000 / 2,722 |
| Engine Displacement | LPG | liter | 4.3L |
| Truck Weight | with 3 stage 240" (6096mm) | lbs/kg | 17,500 / 7955 |
| Travel Speed | Loaded | mph/kph | 8 / 12.9 |
| | Unloaded | mph/kph | 8 / 12.9 |
| Lift Speed | Loaded | fpm/mpm | 85 / 26 |
| | Unloaded | fpm/mpm | 87 / 27 |
| Lowering Speed | Loaded | fpm/mpm | 60 / 18 |
| | Unloaded | fpm/mpm | 50 / 15 |
| Mast Tilt | Forward / Backward | deg | 3 / 4 |
| Load Load Center | E with Triple Mast | in/mm | 31 / 790 |
| Wheelbase | F | in/mm | 77 / 1,940 |
| Rear Overhang | G | in/mm | 13 / 340 |
| Overall Length to Face of Forks | H with Triple Mast | in/mm | 122 / 3,100 |
| Underclearance | I | in/mm | 6 / 152.4 |
| Seat Clearance | J | in/mm | 37 / 930 |
| Overhead Guard Height | K | in/mm | 91 / 2,310 |
| Rear Frame Width | L | in/mm | 52 / 1,320 |
| Fork Carriage Width | M | in/mm | 48 / 1,219 |
| Mast Shift | N | in/mm | 23 / 584 |
| Rear Ground Clearance | P | deg | 23° |
| Center Ground Clearance | Q | deg | 16° |
| Side Deck Width | R | in/mm | 21 / 530 |
| Load Backrest Height | S | in/mm | 42 / 1,070 |
| Turning Radius | T | in/mm | 106 / 2,690 |
| Overall Width | U | in/mm | 54 / 1,370 |
| Side Deck Height | V | in/mm | 52 / 1,320 |
| Fork Size (Standard) ITA CLASS III | | in/cm | 1.75 x 5 x 40 4.5 x 13 x 102 |
| Gradeability | Loaded | % | 15 |
| | Unloaded | % | 15 |
| Wheel Sizes | Front (Solid Pneumatic in/cm Dia x Face) | in/cm | 28 x 12.5 / 71 x 31.75 |
| | Rear (Solid Pneumatic in/cm Dia x Face) | in/cm | 22.7 x 6.5 / 58 x 16.5 |
| Hydrostatic Transmission | Forward / Reverse | | Single Speed |

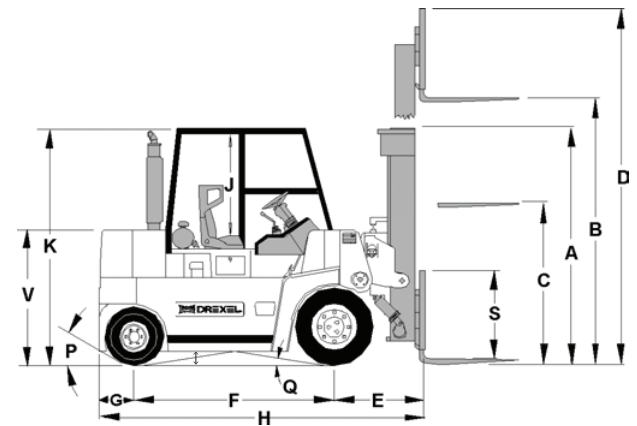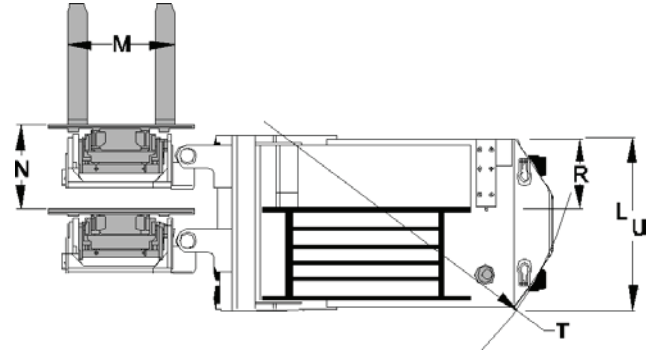

MAST DIMENSIONS

| MAX FORK HEIGHT(B) | | COLLAPSED HEIGHT (A) | | FREE LIFT HEIGHT (C) | | MAX OVERALL HEIGHT (D) | |
|--------------------|------|----------------------|------|----------------------|------|------------------------|------|
| In | M | In | M | In | M | In | M |
| Triple (3-Stage) | | | | | | | |
| 181 | 4.60 | 89 | 2.26 | 55 | 1.40 | 223 | 5.66 |
| 187 | 4.75 | 91 | 2.31 | 57 | 1.45 | 229 | 5.82 |
| 196 | 4.98 | 95 | 2.41 | 61 | 1.55 | 238 | 6.05 |
| 215 | 5.46 | 103 | 2.62 | 71 | 1.80 | 257 | 6.53 |
| 240 | 6.10 | 113 | 2.87 | 79 | 2.01 | 282 | 7.16 |

Above Dimensions are Based on a 9" (23cm) Mast Underclearance

AISLE DIMENSIONS

| LOAD DEPTH X WIDTH | MINIMUM CLEAR AISLE |
|--|---------------------|
| 40" x 48" (1,000 x 1,200mm) | 68" (1,727mm) |
| 48" x 40" (1,200 x 1,000mm) | 72" (1,829mm) |
| Minimum Clear Transfer Aisle with Load | 176" (447cm) |



Landoll continuously improves products. We reserve the right to make any changes in illustrations, specifications, equipment, and prices without prior notice and without changes on previous models.

www.landoll.com/mhp

1900 North Street | Marysville, KS 66508 | (800) 428-5655



R60i5-0520