



## FEATURES

- 4,400 lb. (1,996kg) Capacity
- Lift Heights to 417" (10.6M)
- 72" (1.82M) Stacking Aisle
- 8" (200mm) Sideshifter and 36" (914mm) High Load Backrest Standard
- 32" (813mm) Wide Front Axle
- Dual Inside / Outside Capability
- AC Powered
- Optional Cold Storage Conditioned to -22°F (-30°C)

## DRIVE TRAIN

- Large Diameter Smooth Rubber Drive Tires
- Polyurethane Load Tires
- 220° Front-End Articulation / Steering
- Heavy Duty Dual Rear Wheel Planetary Drives
- Powerful Drive and Hydraulic Motors

## ENGINEERING

- Forward and Rearward Mast Tilt
- Heavy Duty Chassis Design
- 220° DuraSteer Articulated Steering System
- Full Diagnostics Dash Display
- Easily Accessible Components for Low Cost Maintenance

## ERGONOMICS & SAFETY

- Hydraulic Power Steering
- Comfortable Seated Operation with All Truck Controls in Easy Reach
- 4-Post Heavy Duty Overhead Guard
- Safety Deadman Seat Switch
- Clearview 3-Stage Mast
- Key Switch, Horn, Hour Meter, Adjustable Suspension Seat and Steering Column, Seat Belt and Armrest are Standard

## ELECTRICAL

- AC Powered Dual Traction Motor Controller
- AC Powered Hydraulic Pump Motor Controller
- Battery Discharge Indicator with Lift Interrupt
- Lighting and Alarm Accessories Available
- Provisions for RF Terminals Provided

# B40VAC

4-Wheel Heavy Capacity  
Electric Multi-Purpose  
Articulated Forklift Truck



**Material Handling  
Products**

# BENDI B40VAC

## Electric Multi-Purpose VNA | Articulated Forklift Truck

### TECHNICAL DATA

MODEL			B40VAC
Capacity		lbs/kg	4,400 / 1,996
Load Center		in/mm	24 / 600
Power Source			Battery, Electric
Weight with Battery		lbs/kg	13,770 / 6,259 *
Travel Speed	Loaded	mph/kph	6.5 / 10.5
	Unloaded	mph/kph	7 / 11.3
Lift Speed	Loaded	fpm/mpm	90 / 27.4
	Unloaded	fpm/mpm	110 / 33.5
Lowering Speed	Loaded	fpm/mpm	100 / 30.5
	Unloaded	fpm/mpm	90 / 27.4
Mast Tilt	Fwd / Back	deg	1 / 2
Lost Load Center	a	in/mm	11.6 / 294.6
Wheelbase	b	in/mm	72.6 / 1,844
Overall Length to Face of Forks	c	in/mm	122.4 / 2,855
Underclearance	d	in/mm	3 / 76
Cab Floor Height	e	in/mm	31 / 787
Seat Height	f	in/mm	51 / 1,295
Overhead Guard Height	g	in/mm	89 / 2,261
Chassis Width	h	in/mm	48 / 1,219
Gradeability	Unloaded	%	15
	Loaded	%	15
Hydraulic Motor Rating (AC)		kWh	12
Drive Motor Rating (AC)	Dual rear	kWh	5.6 ea - 11.2 Total
Wheel Sizes	Front (2 Each)	in/mm	12x5 / 305x127
	Rear (2 Each)	in/mm	18x7 / 457x178
Traction Control Type			AC
Front Articulation	m	deg	220°

### MAST DIMENSIONS Standard Triple Clear View Full Free Lift

LIFT HEIGHT		LOWERED HEIGHT		*FREE LIFT	
Inches	Meters	Inches	Meters	Inches	Meters
197	5.00	96	2.44	57	1.44
204	5.20	99	2.52	59	1.50
236	6.00	110	2.80	71	1.80
281	7.15	125	3.18	86	2.18
323	8.20	148	3.77	109	2.77
354	9.00	159	4.04	120	3.04
374	9.50	166	4.20	126	3.20
394	10.00	173	4.40	134	3.40
417	10.60	183	4.64	143	3.64



\*All Free Lift heights are stated with 100 CM high load backrests.

### aisle DIMENSIONS

LOAD DEPTH X WIDTH (j x i)	MINIMUM CLEAR AISLE
40" x 48" (1,000 x 1,200mm)	66" (1,676mm)
48" x 40" (1,200 x 1,000mm)	72" (1,828mm)
Minimum Clear Transfer Aisle	121" (3,073mm)

### RECOMMENDED BATTERY

<b>BATTERY DESIGNATION: 24-85-19, 48 VOLT, 765 AHC (6 HOUR RATE)</b>
Nominal Size: 25.9375" x 44.5625" x 22.625" (66 x 113 x 58cm)
Truck Compartment Size: 26" x 44.75" x 23" (66 x 114 x 58cm)
Battery Weight: Min. 2,600 lbs. (1,181kg) - Max. 3,100 lbs. (1,409kg)
Leads are at Position A, 12" (30.5cm) Long, with SB 350 Amp Blue Connector

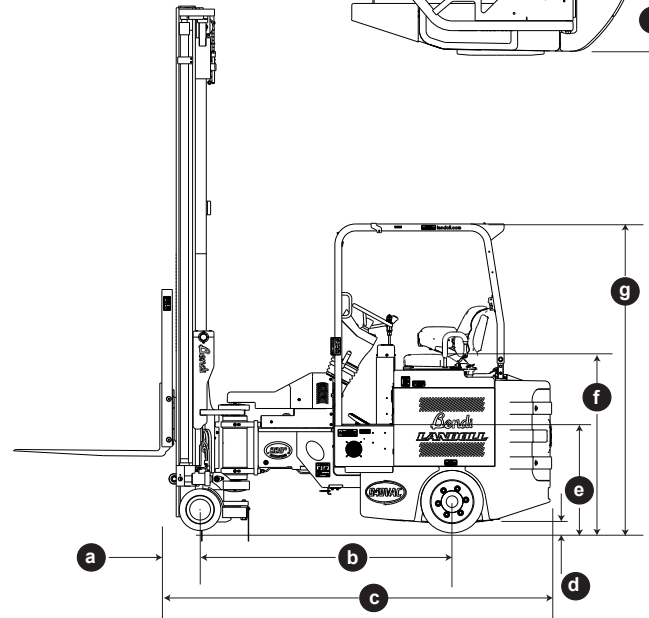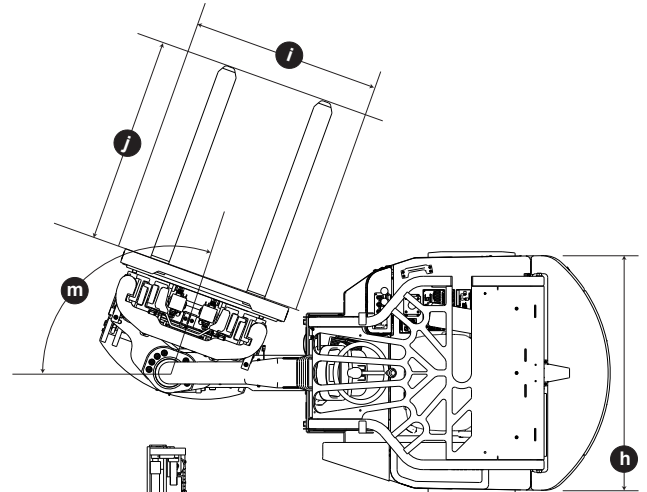

Landoll continuously improves products. We reserve the right to make any changes in illustrations, specifications, equipment, and prices without prior notice and without changes on previous models.

[www.landoll.com/mhp](http://www.landoll.com/mhp)

1900 North Street | Marysville, KS 66508 | (800) 428-5655



B40VAC-0121