



STANDARD FEATURES

- Four Wheel Design, Dual Rear Wheel Drive
- 8" (200 mm) Stroke Integral Side Shifter
- 41" (1041 mm) Stroke Integral Pantograph Reach
- 52" (1321 mm) Reach From Face of Mast
- 37" (940 mm) Wide Tilting and Side Shifting Fork Carriage
- Adjustable Seat and Steering Wheel
- Rotation via DuraSteer™ Actuator, with 5-Year Warranty on Articulation
- Dual Curtis AC Traction Motor Controllers
- Curtis AC Hydraulic Motor Controller
- Battery Discharge Indicator with Slow Alert
- Hydraulic Disk Brakes
- "Floating" Articulated Front Axle
- One Parts and Operator's Manual Included
- Curtis Engage Dash Display
- Hand Actuated Parking Brake
- 36" (914mm) High Backrest
- High Visibility Mast
- 170° Rear View Mirror
- Safety Seat Switch and Seat Belt
- Fixed Mast with Carriage Tilt of 3° Fwd / 4° Rwd
- 48 Volt Electrical System
- Three Section Hydraulic Control Valve
- Smooth Rubber Drive Tires
- Soft Polyurethane Load Wheel Tires
- 40" Tapered Tip Forks - Rear Tow Hitch Pin
- Meets ANSI B56.1

OPTIONAL FEATURES

- Non-Standard Fork Lengths
- LED Headlights, Flashing Light and Rear Safety Lights
- Non-Marking Tires
- Vinyl Seat
- Slide-Out Sideways Battery Tray
- Fire Extinguisher
- Lazer Fork Height Indicator
- Carriage Mounted Camera with Operator Compartment Monitor
- Capable of Freezer Operation to -22°F (-30°C)
- 31" (787 mm) fork carriage for Euro Pallet.
- 44" (1118 mm) Reach From Face of Mast

B40AC-DR B50AC-DR

**4-Wheel Bendi Electric Multi-Purpose
Narrow Aisle Articulated Forklift Truck**



**Material Handling
Products**


BENDI DEEP REACH B40AC-DR & B50AC-DR

Electric Multi-Purpose | Articulated Forklift Truck

TECHNICAL DATA

MODEL				B40AC-DR	B50AC-DR
Capacity			lbs/kg	2,500 / 1,136	3,000 / 1,364
Load Center			in/mm	24 / 600	24 / 600
Power Source				Battery, Electric	Battery, Electric
Weight with Battery			lbs/kg	14,270 / 6,486	17,350 / 7,886
Travel Speed	Loaded		mph/kph	6.5 / 10.5	6.5 / 10.5
	Unloaded		mph/kph	7 / 11.3	7 / 11.3
Lift Speed	Loaded		fpm/mpm	90 / 27.4	90 / 27.4
	Unloaded		fpm/mpm	110 / 33.4	110 / 33.4
Lowering Speed	Loaded		fpm/mpm	100 / 30.5	100 / 30.5
	Unloaded		fpm/mpm	90 / 27.4	90 / 27.4
Carriage Tilt		Fwd / Back	deg	3 / 4	3 / 4
Lost Load Center	E		in/mm	21 / 533.4	21 / 533.4
Lost Load Center Extended	E*		in/mm	61 / 1,549.4	61 / 1,549.4
Wheelbase	F		in/mm	72.6 / 1,844	72.6 / 1,844
Rear Overhang	G		in/mm	28.6 / 726	31.6 / 803
Overall Length to Face of Forks	H		in/mm	122.2 / 3,103.9	125.2 / 3,180
Underclearance	I		in/mm	3 / 76	3 / 76
Cab Floor Height	J		in/mm	31.3 / 795	31.3 / 795
Seat Height	K		in/mm	52 / 1,321	52 / 1,321
Overhead Guard Height	L		in/mm	89 / 2,261	89 / 2,261
Chassis Width	M		in/mm	50 / 1,270	56 / 1,422.4
Battery Compartment Height	N		in/mm	19.24 / 489	19.24 / 489
Fork Length	O		in/mm	40 / 1,016	40 / 1,016
Front Articulation	P		deg	180	180
Gradeability	Unloaded		%	15	15
	Loaded		%	15	15
Hydraulic Motor Rating		Continuous Duty	kW	12	12
Drive Motor Rating		Continuous Duty	kW	2 x 5.6 11.2 Total	2 x 7.5 15 Total
Wheel Sizes	Front (1 each)		in/mm	14x5 / 356x127	14x5 / 356x127
	Rear (2 each)		in/mm	18x7 / 457x178	18x9 / 457x229
Traction Control Type		Curtis		AC	AC
Hydraulic Control Type		Curtis		AC	AC

Bendi

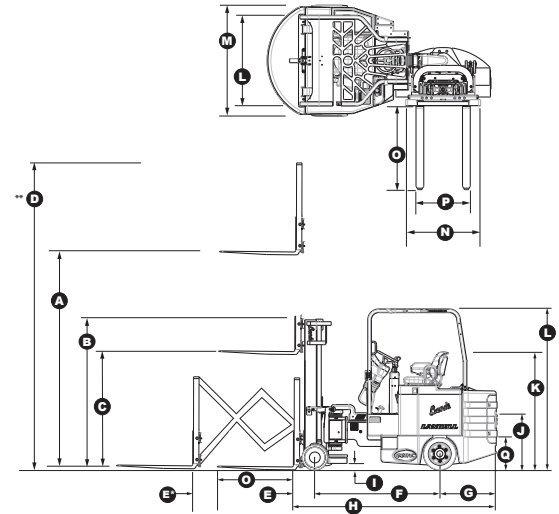

aisle DIMENSIONS

B40AC-DR	
LOAD DEPTH X WIDTH (Q x R)	MINIMUM CLEAR AISLE
40" x 48" (1,000 x 1,200mm)	96" (2,438mm)
48" x 40" (1,200 x 1,000mm)	96" (2,438mm)
Minimum Clear Transfer Aisle	119" (3,023mm)
B50AC-DR	
LOAD DEPTH X WIDTH (Q x R)	MINIMUM CLEAR AISLE
40" x 48" (1,000 x 1,200mm)	96" (2,438mm)
48" x 40" (1,200 x 1,000mm)	96" (2,438mm)
Minimum Clear Transfer Aisle	122" (3,099mm)

RECOMMENDED BATTERY

BATTERY FOR B40AC-DR
Battery Designation: 24-85-21, 48 Volt, 850 AHC (6 Hour Rate)
Nominal size: 32.75" x 38.125" x 22.63" (83 x 97 x 57cm)
Truck compartment size: 33.25" x 38.875" x 23" (84 x 99 x 59cm)
Battery Weight: Min 3,250 lbs. (1,477kg) - Max 3,400 lbs. (1,545kg)
Leads are at Position A, 12" Long, with SB 350 Amp Blue Connector
BATTERY FOR B50AC-DR
Battery Designation: 24-85-23, 48 Volt, 935 AHC (6 Hour Rate)
Nominal Size to 32.25" x 44.75" x 22.63" (82 x 114 x 58cm)
Truck Compartment size to 32.5" x 44.875" x 23" (83 x 114 x 59cm)
Battery Weight: Min. 3,500 lbs. (1,590kg) - Max. 4,000 lbs. (1,818kg)
Leads are at Position A, 12" Long, with SB 350 Amp Blue Connector

Landoll continuously improves products. We reserve the right to make any changes in illustrations, specifications, equipment, and prices without prior notice and without changes on previous models.

MAST DIMENSIONS

LIFT HEIGHT (A)		LOWERED HEIGHT (B)		*FREE LIFT (C)		OVERALL HEIGHT (D)	
Inches	Meters	Inches	Meters	Inches	Meters	Inches	Meters
198	5.03	89	2.26	53	1.35	235	5.97
210	5.33	95	2.41	59	1.50	247	6.27
240	6.10	107	2.72	71	1.80	277	7.04
258	6.55	113	2.87	77	1.96	295	7.50
270	6.86	119	3.02	83	2.11	307	7.80
300	7.62	131	3.33	95	2.41	337	8.56
330	8.38	149	3.78	113	2.87	367	9.32
366	9.30	161	4.09	125	3.18	413	10.49
390	9.91	169	4.29	133	3.38	427	10.85
425	10.80	191	4.85	155	3.94	462	11.73

www.landoll.com/mhp

1900 North Street | Marysville, KS 66508 | (800) 428-5655



Intertek



ANAB



MHEDA



Member Company



Member IWLA



IARW

B40-50AC-DR-0520