



MELISSA HARTMANN APRIL 8, 2021



The ultimate tow tractor. Reinvented.

The industry benchmark for compact tow tractors has once again raised the bar. Still a quiet and low-maintenance workhorse with an unbeatable turning radius and up to 20,000-lb. towing capacity, but now with leaf spring suspension and shock absorbers, flat-free solid softy tires, inching control, protected electrical components and much more – all standard. Power and performance are delivered through a brushless AC powertrain with efficient direct-drive differential, hefty 1" rear-end plate and large drum brakes. We"ve also got your back with a long list of standard ergonomic and safety features. EE rating available.



Other Models: 36V, 48V















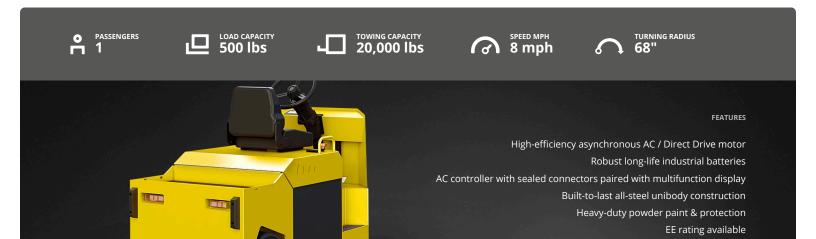







Dimensions

VEHICLE		
Height	58"	1,473 mm
Length	72"	1,829 mm
Width	38"	965 mm
Wheel Base	49.5"	1,257 mm
Ground Clearance	4"	102 mm
DECK		
Height	26.5"	673 mm
Width	37"	940 mm
Length	16.3"	413 mm
UNIT WEIGHT		
With Batteries	n/a	n/a
Without Batteries	2,000 lbs	907 kg
BATTERIES		
Height	24"	610 mm
Length	35.8"	908 mm
Width	26"	660 mm
Weight - Min	1,700 lbs	771 kg
Weight - Max	2300	2300

Performances

VEHICLE

Passengers	1	
Load Capacity	500 lbs	227 kg
Tow Capacity	20,000 lbs	9,072 kg
Drawbar Pull - Normal	500 lbs	2,224 N
Drawbar Pull - Ultimate	1,450 lbs	6,450 N
Speed MPH	8 mph	13 km/h
Turning Radius	68"	1,727 mm

 $\label{thm:constraints} \textit{Vehicle shown may have optional accessories and is provided for illustrative purposes only.}$

Specifications and standard equipment are subject to change without notice.

Specifications

POWERTRAIN

Motor	15 HP brushless AC motor	
Controller	Electronic AC speed controller	
Drive Axle	Helical gear differential	
Brakes	Rear wheel hydraulic drum brakes, regenerative braking	
Wheels	Solid tires	
Transmission	Direct drive	
Suspension	Leaf springs rear suspension system	
Starter	n/a	
Clutch	n/a	
Engine	n/a	
ENERGY		
Voltage	48 Volt	
Battery	No battery included	
Charger	No charger included	
Alternator	n/a	
Fuel	n/a	
CHASSIS		

OPERATOR COMPARTMENT

Body

Color

Lights

Steering	Automotive steering wheel
Seats	Semi-suspension seat on slide adjusters
Indicators	Multifunction display including speedometer,
	battery state of charge, hour meter, odometer
	and fault warnings. Password-protected
	parameters and monitoring capability
Safety	Reverse alarm, deadman seat switch, horn,
	emergency stop button, anti slip griptape
Accessories	48V/12V converter for 12-volt accessories, backlit and sealed buttons

plate, powder coating

All-steel unibody construction, 2" rear-end

Security orange or federal yellow

LED dual headlights & tail/brake lights

Standards

n/a

POPULAR OPTIONS

With unlimited configurations, we make customization quick, easy and affordable.

Hitches

MT340-STEERING02

Clevis type hitch (1") with safety spring"	
Hand-lever hitch release (for clevis and automatic coupling hitch)	
Factory programmed to 6 mph max. speed	
Strobe light on light bar (requires light bar option)	
Deluxe Grammer seat with suspension, cloth	
	Hand-lever hitch release (for clevis and automatic coupling hitch) Factory programmed to 6 mph max. speed Strobe light on light bar (requires light bar option)

Tilt and telescopic steering column (FWD/N/REV lever standard on right side)

The list above shows the most popular options for this vehicle. More options are available. To learn more about the MT - 340 - 48V HD options, please contact your representative. Options, specifications and standard equipment are subject to change without notice.





Melissa Hartmann Marketing Team **Atlas Companies**

mhartmann@AtlasLift.com