



## VEHICLE OVERVIEW

MELISSA HARTMANN

APRIL 8, 2021

**MT 900** MODEL 48V

### The industry's most powerful workhorse.

This powerhouse tows a massive 120,000-lb. load and brakes on a dime. Nothing matches it in the industry. It's also remarkably maneuverable, thanks to its short turning radius, smooth power steering, and dual planetary wheel drive with parallel controls to prevent spinning and lateral sliding. 2 x 15 hp fan-cooled motors delivers higher output at lower speeds; the oversized industrial batteries and electric regenerative braking ensure safer stopping and longer running times. E-type clevis hitch with inching button.



#### Tow Tractors

Other Models : 48V HD

 PASSENGERS  
1

 LOAD CAPACITY  
400 lbs

 TOWING CAPACITY  
120,000 lbs




 SPEED MPH  
4 mph

 TURNING RADIUS  
99"



#### FEATURES

- Safe and efficient inching control buttons
- Silent and effortless electric power steering
- Robust long-life industrial batteries
- Built-to-last all-steel unibody construction
- Heavy-duty powder paint & protection

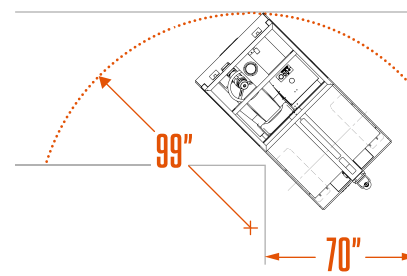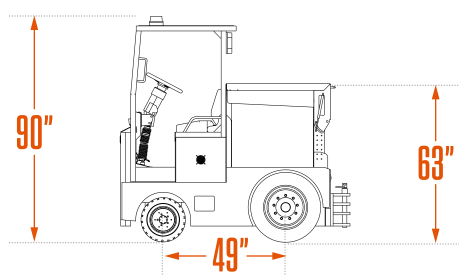

## Dimensions

### VEHICLE

Height	90"	2,286 mm
Length	92"	2,337 mm
Width	45"	1,143 mm
Wheel Base	49"	1,245 mm
Ground Clearance	n/a	n/a

### DECK

Height	n/a	n/a
Width	n/a	n/a
Length	n/a	n/a

### UNIT WEIGHT

With Batteries	11,000 lbs	4,990 kg
Without Batteries	6,000 lbs	2,722 kg

### BATTERIES

Height	31,5	31,5
Length	34"	864 mm
Width	42"	1,067 mm
Weight - Min	4,000 lbs	1,814 kg
Weight - Max	5,000 lbs	2,268 kg

## Performances

### VEHICLE

Passengers	1	
Load Capacity	400 lbs	181 kg
Tow Capacity	120,000 lbs	54,431 kg
Drawbar Pull - Normal	2,500 lbs	11,121 N
Drawbar Pull - Ultimate	4,800 lbs	21,351 N
Speed MPH	4 mph	6 km/h
Turning Radius	99"	2,515 mm

## Specifications

### POWERTRAIN

Motor	2 x 15 hp shunt motors
Controller	Dual 400A SEPEX controllers
Drive Axle	Dual planetary wheel drives with manual disengage
Brakes	Electric regenerative braking, spring applied parking brake with electric release
Wheels	Solid rubber wheels
Transmission	Direct drive, helical gears accelerator/brake pedal, inching controls on rear
Suspension	Front and rear rigid axles
Starter	n/a
Clutch	n/a
Engine	n/a

### ENERGY

Voltage	48 Volt
Battery	No battery included
Charger	No charger Included
Alternator	n/a
Fuel	n/a

### CHASSIS

Body	All-steel unibody construction
Color	Security orange or federal yellow
Lights	LED dual headlights & tail/brake lights with protective top

### OPERATOR COMPARTMENT

Steering	Power Steering, Tilt-Telescopic Steering Column
Seats	One Adjustable Grammer Seat
Indicators	Digital battery status indicator
Safety	Deadman seat switch, reverse alarm, horn
Accessories	48V/12V converter, E-Type clevis hitch

## Standards

Conforms to requirements for type E, UL 583, ANSI B56.9



Vehicle shown may have optional accessories and is provided for illustrative purposes only.

Specifications and standard equipment are subject to change without notice.

## POPULAR OPTIONS

**GET THE IDEAL VEHICLE FOR THE JOB.**

With unlimited configurations, we make customization quick, easy and affordable.

---

### Cabs & Top Covers

---

364-041	Steel cab, doors, wiper, and rearview mirror
---------	----------------------------------------------

### Hitches

---

TBD.11	Hydraulic hitch, 1,000 lbs lifting capacity
--------	---------------------------------------------

### Safety Features

---

360-027	Cab mounted strobe light
360-023	Motion beeper

### Seats

---

448N-049	Seat belt, retractable
----------	------------------------

*The list above shows the most popular options for this vehicle. More options are available. To learn more about the MT - 900 - 48V options, please contact your representative. Options, specifications and standard equipment are subject to change without notice.*



**Melissa Hartmann**  
Marketing Team

[mhartmann@AtlasLift.com](mailto:mhartmann@AtlasLift.com)

**Atlas Companies**



[www.motrec.com](http://www.motrec.com)