


MELISSA HARTMANN






The game-changing stock chaser.


The industry"s most versatile stand-up stock chaser / order picker now offers even more. More capacity: up to 6,000 lbs. for towing and 1,750 lbs. for loads. More standard features: leaf spring suspension, integrated 2-step ladder and loading anchors, USB charger, storage compartments, fully protected electrical components and more. More options: AC powertrain and robust front rubber bumper. Of course, the MS-260 still has a long list of standard driver-friendly features: 59" deck, dual front wheels, short turning radius, light touch controls, padded backrest, ergonomic driving position, low-step entry.... And as always, it can be fully customized.







Stock chasers Other Models : 24V, 48V

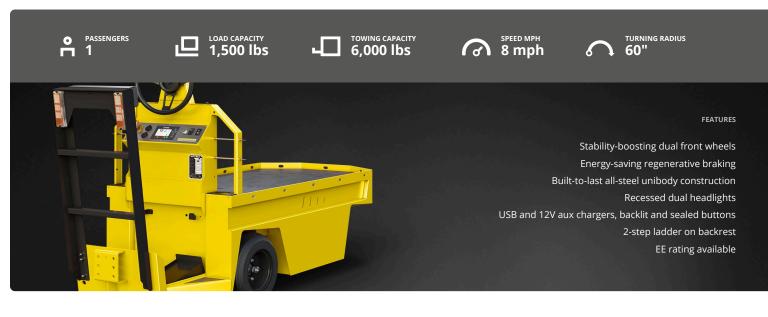







Dimensions

VEHICLE

Height	54"	1,372 mm
Length	87"	2,210 mm
Width	30"	762 mm
Wheel Base	43.5"	1,105 mm
Ground Clearance	n/a	n/a
DECK		
Height	23"	584 mm
Width	29.3"	743 mm
Length	59.3"	1,505 mm
UNIT WEIGHT		
With Batteries	n/a	n/a
Without Batteries	670 lbs	304 kg
BATTERIES		
Height	n/a	n/a
Length	n/a	n/a
Width	n/a	n/a
Weight - Min	n/a	n/a

Performances

VEHICLE		
Passengers	1	
Load Capacity	1,500 lbs	680 kg
Tow Capacity	6,000 lbs	2,722 kg
Drawbar Pull - Normal	150 lbs	667 N
Drawbar Pull - Ultimate	500 lbs	2,224 N
Speed MPH	8 mph	13 km/h
Turning Radius	60"	1,524 mm

Vehicle shown may have optional accessories and is provided for illustrative purposes only.

Specifications and standard equipment are subject to change without notice.

Specifications

POWERTRAIN	
Motor	10 HP shunt motor
Controller	SEPEX Electronic speed controller
Drive Axle	Helical gear differential
Brakes	Self-adjusting H.D. drum brakes, automatic parking brake, regenerative braking
Wheels	Pneumatic LRC tires
Transmission	Direct drive
Suspension	Leaf springs rear suspension system, dual front wheels to ensure the stability
Starter	n/a
Clutch	n/a
Engine	n/a
ENERGY	
Voltage	36 Volt
Battery	Six 6V-225AH batteries
Charger	High-frequency (85-265VAC / 45-65Hz, 1kw), built-in and automatic
Alternator	n/a
Fuel	n/a
CHASSIS	
Body	All-steel unibody construction, powder coating
Color	Security orange or federal yellow
Lights	LED dual headlights

OPERATOR COMPARTMENT

Steering	Automotive steering wheel
Seats	Padded backrest
Indicators	Battery status indicator
Safety	Reverse alarm, deadman foot switch, horn, emergency stop button, jam-free pedal, anti slip griptape, charging interlock switch
Accessories	USB charger, 36V/12V converter for 12-volt accessories, backlit and sealed buttons

Standards

Conforms to requirements for type E, UL 583, ANSI B56.9



Batteries & Chargers	
MS260-BATTERY11	TPPL maintenance-free batteries, 3-year warranty. Opportunity charge standard, fast charge ready (166AH)
Body Options	
MS260-BUMPER01	Front steel protective guard
Decks	
MS260-DECK08	Rubber mat on deck
Driver Area Options	
MS260-041	Clipboard with clip and lip
Equipments	
260-053	6-step ladder with operator backrest with solid softy front tires
Hitches	
260-056	Clevis type hitch with safety spring
Safety Features	
MS260-LADDER01BSL	3-step ladder and blue safety light facing forward
Seats	
MS260-LADDER00H	12" comfort backrest (8" taller than standard)"
MS260-SEAT01	Sit-down / Stand-up seat (requires solid softy rubber wheels)

The list above shows the most popular options for this vehicle. More options are available. To learn more about the MS - 260 - 36V options, please contact your representative. Options, specifications and standard equipment are subject to change without notice.



Melissa Hartmann Marketing Team





Atlas Companies