



UTILITRUCK



Shown With Options

RATED CAPACITY

up to
1,500 lbs.

UP TO 4 PASSENGERS



MAX SPEED FORWARD UP TO

19 MPH

TOW UP TO 1,500 LBS



Columbia's Utilitruck is Built For Work on college campuses, park systems, military bases or industrial complexes. With zero emissions, your Utilitruck is even friendly to indoor environments!

Frequently used in commercial fleets, you can rest assured the Utilitruck will also have a positive impact on your bottom line!

The Utilitruck is engineered for safety, with 4-wheel hydraulic brakes, an AC-powered drive system, and automotive-grade lighting, controls and steering.



- 1 Hard Door Cab
- 2 Aluminum Van Enclosure
- 3 Utility Strobe Light



COLUMBIA

BUILT FOR WORK



UTILITRUCK

Dimensions

Width: 47 in.

Step Height: 12.5 in.

Ground Clearance: 7.5 in.

Power Train

Motor: 48-volt, AC induction, NEMA class H temperature rated

Batteries: Eight, 6-volt, 232 amp hour, 122 minute, deep cycle

Controller Rating: 450 amp

Performance

Max Speed: 19 MPH


Range ¹: Up to 40 miles

Chassis

Brakes: 4 Wheel hydraulic, front discs, rear drums, automatic parking brake

Suspension: Front – Double A-arm independent coil spring over shock absorbers
Rear– Independent leaf springs with rubber helper springs

Tires: 205/65-10 10-ply DOT rated tire



2X | 2 Passengers


Length: 113 in.

Wheel Base: 74 in.

Turning Radius: 219 in.

Rated Capacity ²: 1,000 lbs.

Vehicle Weight: 1,500 lbs.

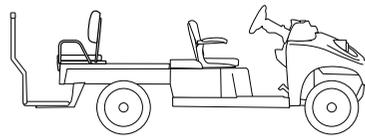

2+2 | 4 Passengers



Length: 131 in.

Wheel Base: 74 in.

Turning Radius: 219 in.

Rated Capacity ²: 1,000 lbs.

Vehicle Weight: 1,600 lbs.

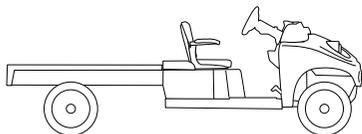

2XL | 2 Passengers


Length: 137 in.

Wheel Base: 98 in.

Turning Radius: 304 in.

Rated Capacity ²: 1,500 lbs.

Vehicle Weight: 1,650 lbs.

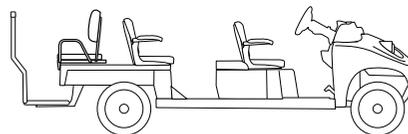

4+2 | 6 Passengers


Length: 155 in.

Wheel Base: 98 in.

Turning Radius: 304 in.

Rated Capacity ²: 1,500 lbs.

Vehicle Weight: 1,800 lbs.

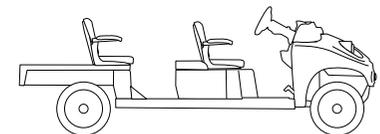

4X | 4 Passengers

Length: 137 in.

Wheel Base: 98 in.

Turning Radius: 304 in.

Rated Capacity ²: 1,500 lbs.

Vehicle Weight: 1,750 lbs.

Features, options, specifications, color availability and model designation are subject to change without notice. Some vehicles are pictured with options that may be available at extra cost or may not be available on some models. Ask your dealer about the availability of options and verify that the vehicle you order includes the equipment you require.

¹ Range will vary depending on temperature, grade, payload and driving style. | ² Rated Capacity Includes personnel, cargo, options and accessories.

All specifications are subject to change without notice.

Columbia Vehicle Group, Inc.

A Nordic Group Company | Business Ventures Since 1947

1115 Commercial Ave. Reedsburg, WI 53959
columbiavehicles.com



COLUMBIA



TOMBERLIN



UTILITRUCK

**RATED
CAPACITY**

UP TO
1,250 LBS

**MOVE
UP TO 6
PASSENGERS**



**MAX SPEED
FORWARD
UP TO**

**25
MPH**

**TOW
UP TO
1,500 LBS**



Shown With Options

Columbia's Utilitruck is Built For Work on college campuses, park systems, military bases or industrial complexes. With zero emissions, your Utilitruck is even friendly to indoor environments!

Frequently used in commercial fleets, you can rest assured the Utilitruck will also have a positive impact on your bottom line!

The Utilitruck is available as a low-speed-vehicle, and is engineered for safety, with 4-wheel hydraulic brakes, an AC-powered drive system, and automotive-grade lighting, controls and steering. ²

LSV



1



2



3

- 1 Ladder Rack
- 2 Back-up Camera
- 3 2nd Row Seat



COLUMBIA

BUILT FOR WORK



UTILITRUCK

Dimensions

Width : 60 in. w/ Mirrors

Step Height: 12.5 in.

Ground Clearance: 7.5 in.

Power Train

Motor: 48-volt, AC induction, NEMA class H temperature rated

Batteries: Eight, 6-volt, 232 amp hour, 122 minute, deep cycle

Controller Rating: 450 amp

Performance

Max Speed: 25 MPH


Range ¹: Up to 40 miles

Chassis

Brakes: 4-wheel hydraulic, front discs, rear drums, automatic parking brake

Suspension: Front – Double A-arm independent coil spring over shock absorbers
Rear– Independent leaf springs with rubber helper springs

Tires: 205/65-10 10-ply DOT rated



2X | 2 Passengers


Length: 113 in.

Wheel Base: 74 in.

Turning Radius: 219 in.

Rated Capacity ²: 1,000 lbs.

Vehicle Weight: 1,600 lbs.

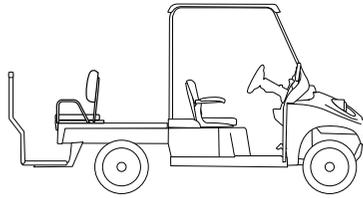

2+2 | 4 Passengers



Length: 131 in.

Wheel Base: 74 in.

Turning Radius: 219 in.

Rated Capacity ²: 900 lbs.

Vehicle Weight: 1,700 lbs.

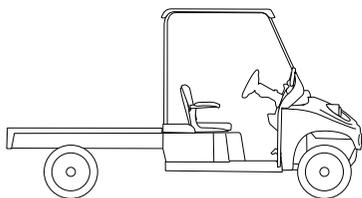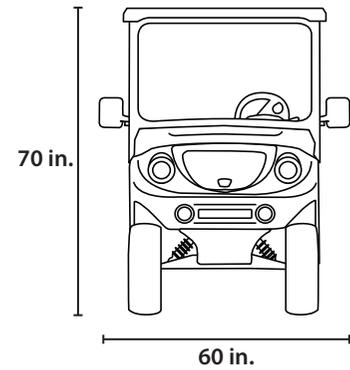

2XL | 2 Passengers


Length: 137 in.

Wheel Base: 98 in.

Turning Radius: 304 in.

Rated Capacity ²: 1,250 lbs.

Vehicle Weight: 1,750 lbs.

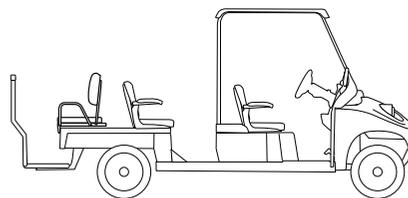

4+2 | 6 Passengers


Length: 155 in.

Wheel Base: 98 in.

Turning Radius: 304 in.

Rated Capacity ²: 1,100 lbs.

Vehicle Weight: 1,900 lbs.

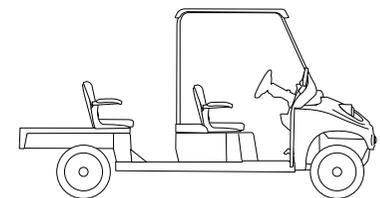

4X | 4 Passengers

Length: 137 in.

Wheel Base: 98 in.

Turning Radius: 304 in.

Rated Capacity ²: 1,150 lbs.

Vehicle Weight: 1,850 lbs.

Features, options, specifications, color availability and model designation are subject to change without notice. Some vehicles are pictured with options that may be available at extra cost or may not be available on some models. Ask your dealer about the availability of options and verify that the vehicle you order includes the equipment you require.

¹ Range will vary depending on temperature, grade, payload and driving style. | Rated Capacity Includes personnel, cargo, options and accessories.

² The Summit Utilitruck may be equipped as a street legal vehicle which meets or exceeds the requirements of NHTSA CFR title 49-571.500
Check with your local municipality for specific laws and regulations for LSV vehicles.

Columbia Vehicle Group, Inc.

A Nordic Group Company | Business Ventures Since 1947

1115 Commercial Ave. Reedsburg, WI 53959
columbiavehicles.com



COLUMBIA



TOMBERLIN